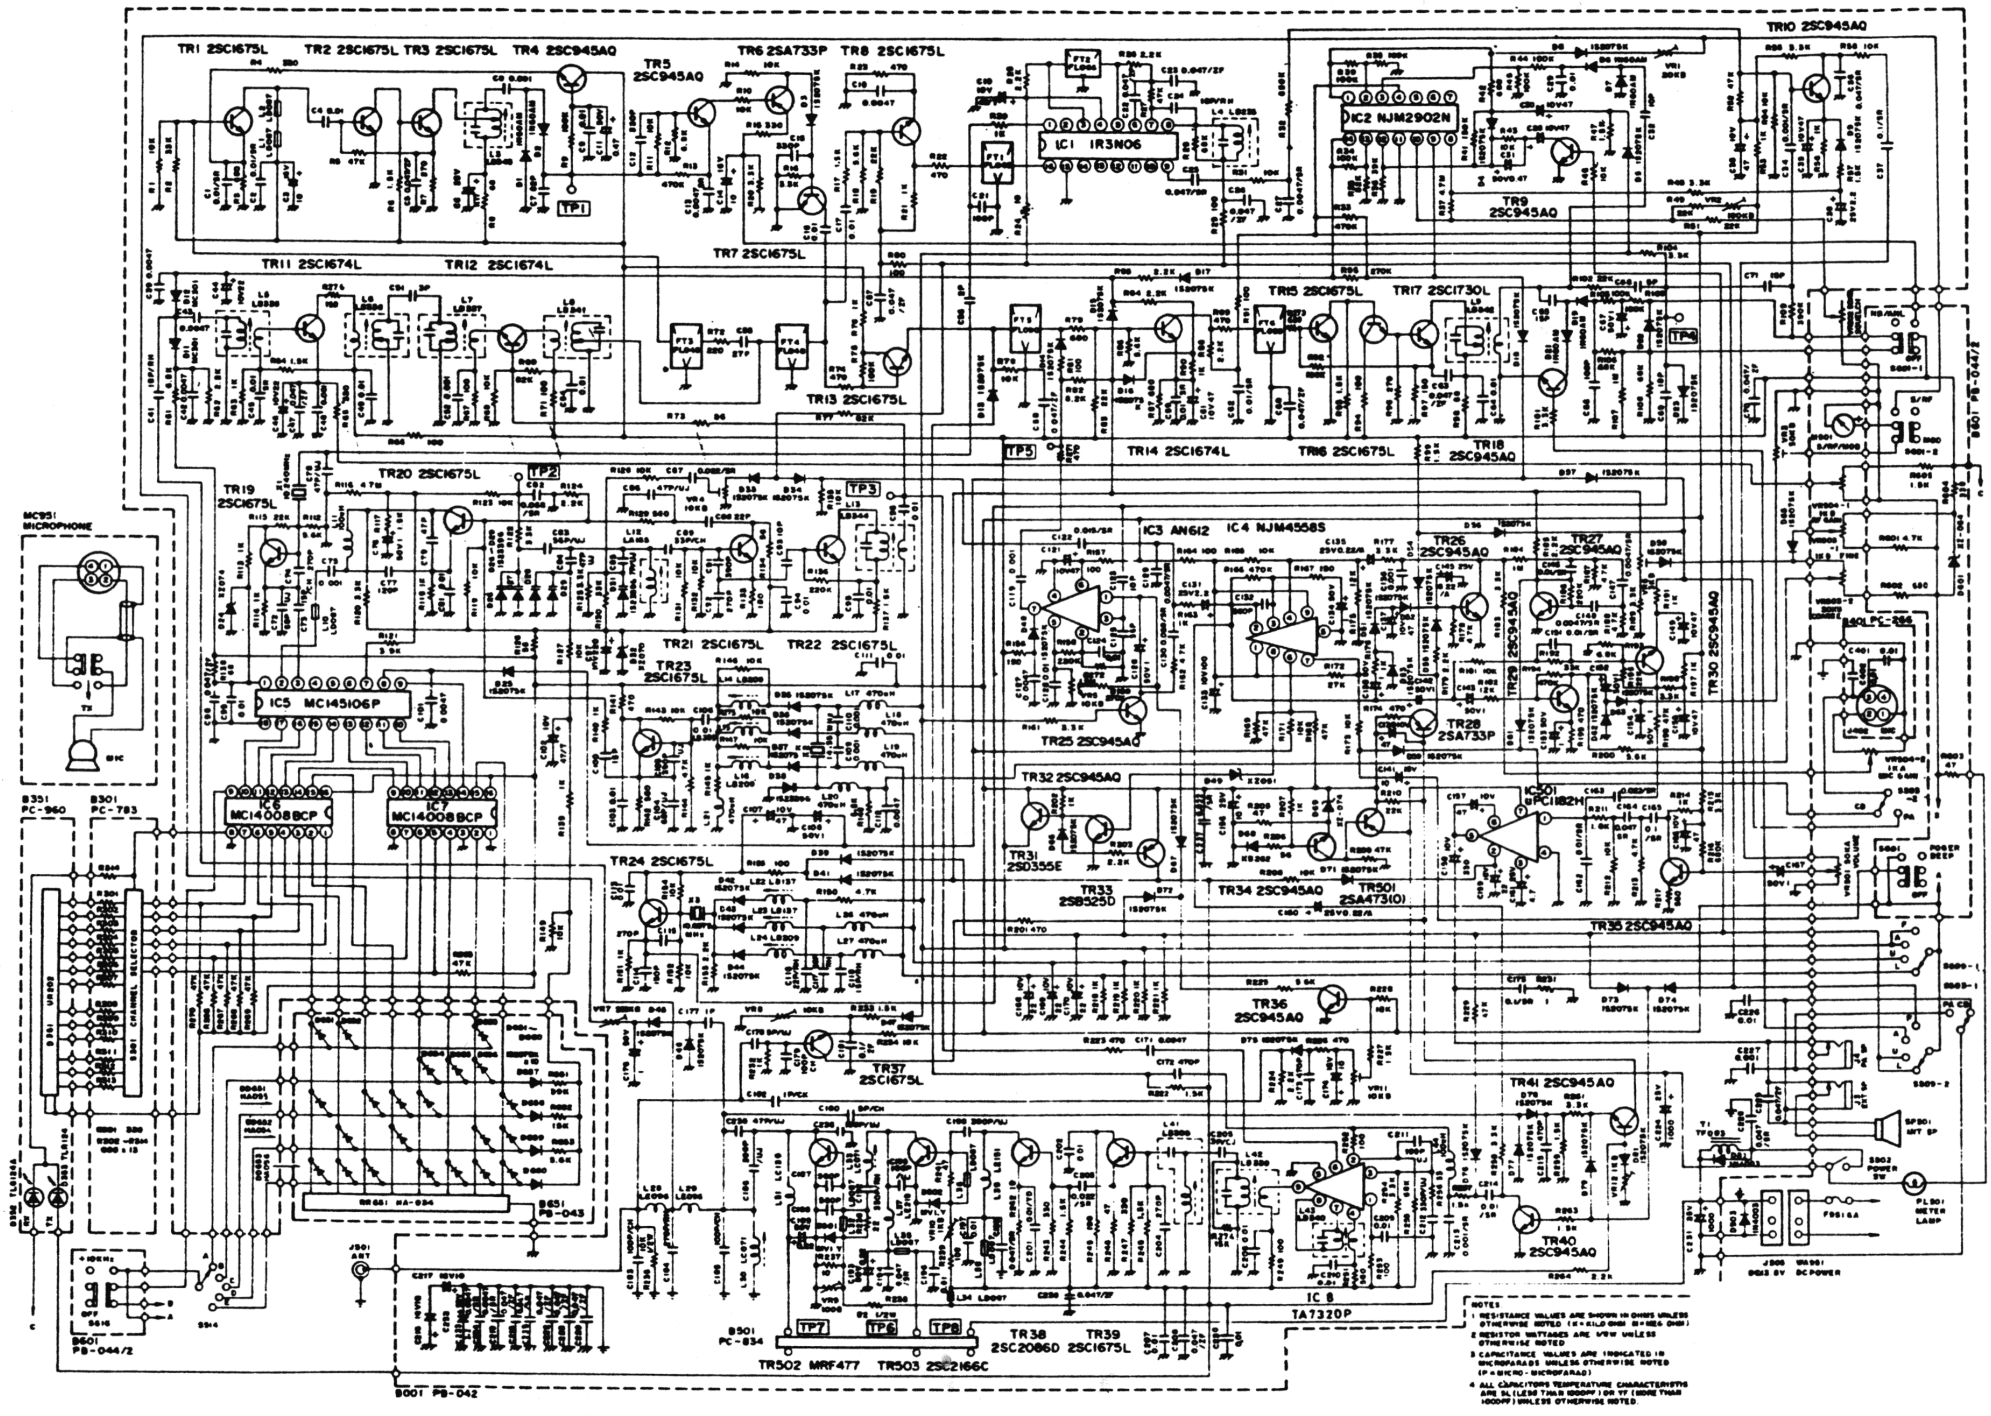
TR1 2SC1675L
TR2 2SC1675L
TR3 2SC1675L
TR4 2SC945AQ
TR5 2SC945AQ
TR6 2SA733P
TR8 2SC1675L
TR10 2SC945AQ
IC1 IR3N06
IC2 NJM2902N
TR9 2SC945AQ
TR11 2SC1674L
TR12 2SC1674L
TR7 2SC1675L
TR13 2SC1675L
TR15 2SC1675L
TR17 2SC1730L
TR14 2SC1674L
TR16 2SC1675L
TR18 2SC945AQ
TR19 2SC1675L
TR20 2SC1675L
TR21 2SC1675L
TR22 2SC1675L
TR23 2SC1675L
IC3 AN612
IC4 NJM4558S
TR26 2SC945AQ
TR27 2SC945AQ
TR29 2SC945AQ
TR30 2SC945AQ
TR25 2SC945AQ
TR28 2SA733P
TR32 2SC945AQ
TR31 2SD355E
TR33 2SB525D
TR34 2SC945AQ
TR501 2SA473(O)
IC501 BP1182H
TR35 2SC945AQ
TR24 2SC1675L
TR36 2SC945AQ
TR37 2SC1675L
TR41 2SC945AQ
TR40 2SC945AQ
IC5 MC145106P
IC6 MC14008BCP
IC7 MC14008BCP
IC8 TA7320P
TR38 2SC2086D
TR39 2SC1675L
TR502 MRF477
TR503 2SC2166C
MC951 MICROPHONE
B351 PC-960
B301 PC-783
B601 PB-044/2
B501 PC-834
B001 PB-042
B651 PB-043
TP1
TP2
TP3
TP4
TP5
TP6
TP7
TP8
NOTES
1 RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED (K=KILO OHM M=MEG OHM)
2 RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE NOTED
3 CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED (P=MICRO-MICROFARAD)
4 ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE SL (LESS THAN 1000PF) OR YF (OVER THAN 1000PF) UNLESS OTHERWISE NOTED.

"JACKSON"