


# SCHEMATIC DIAGRAM

UNIDEN PC-77

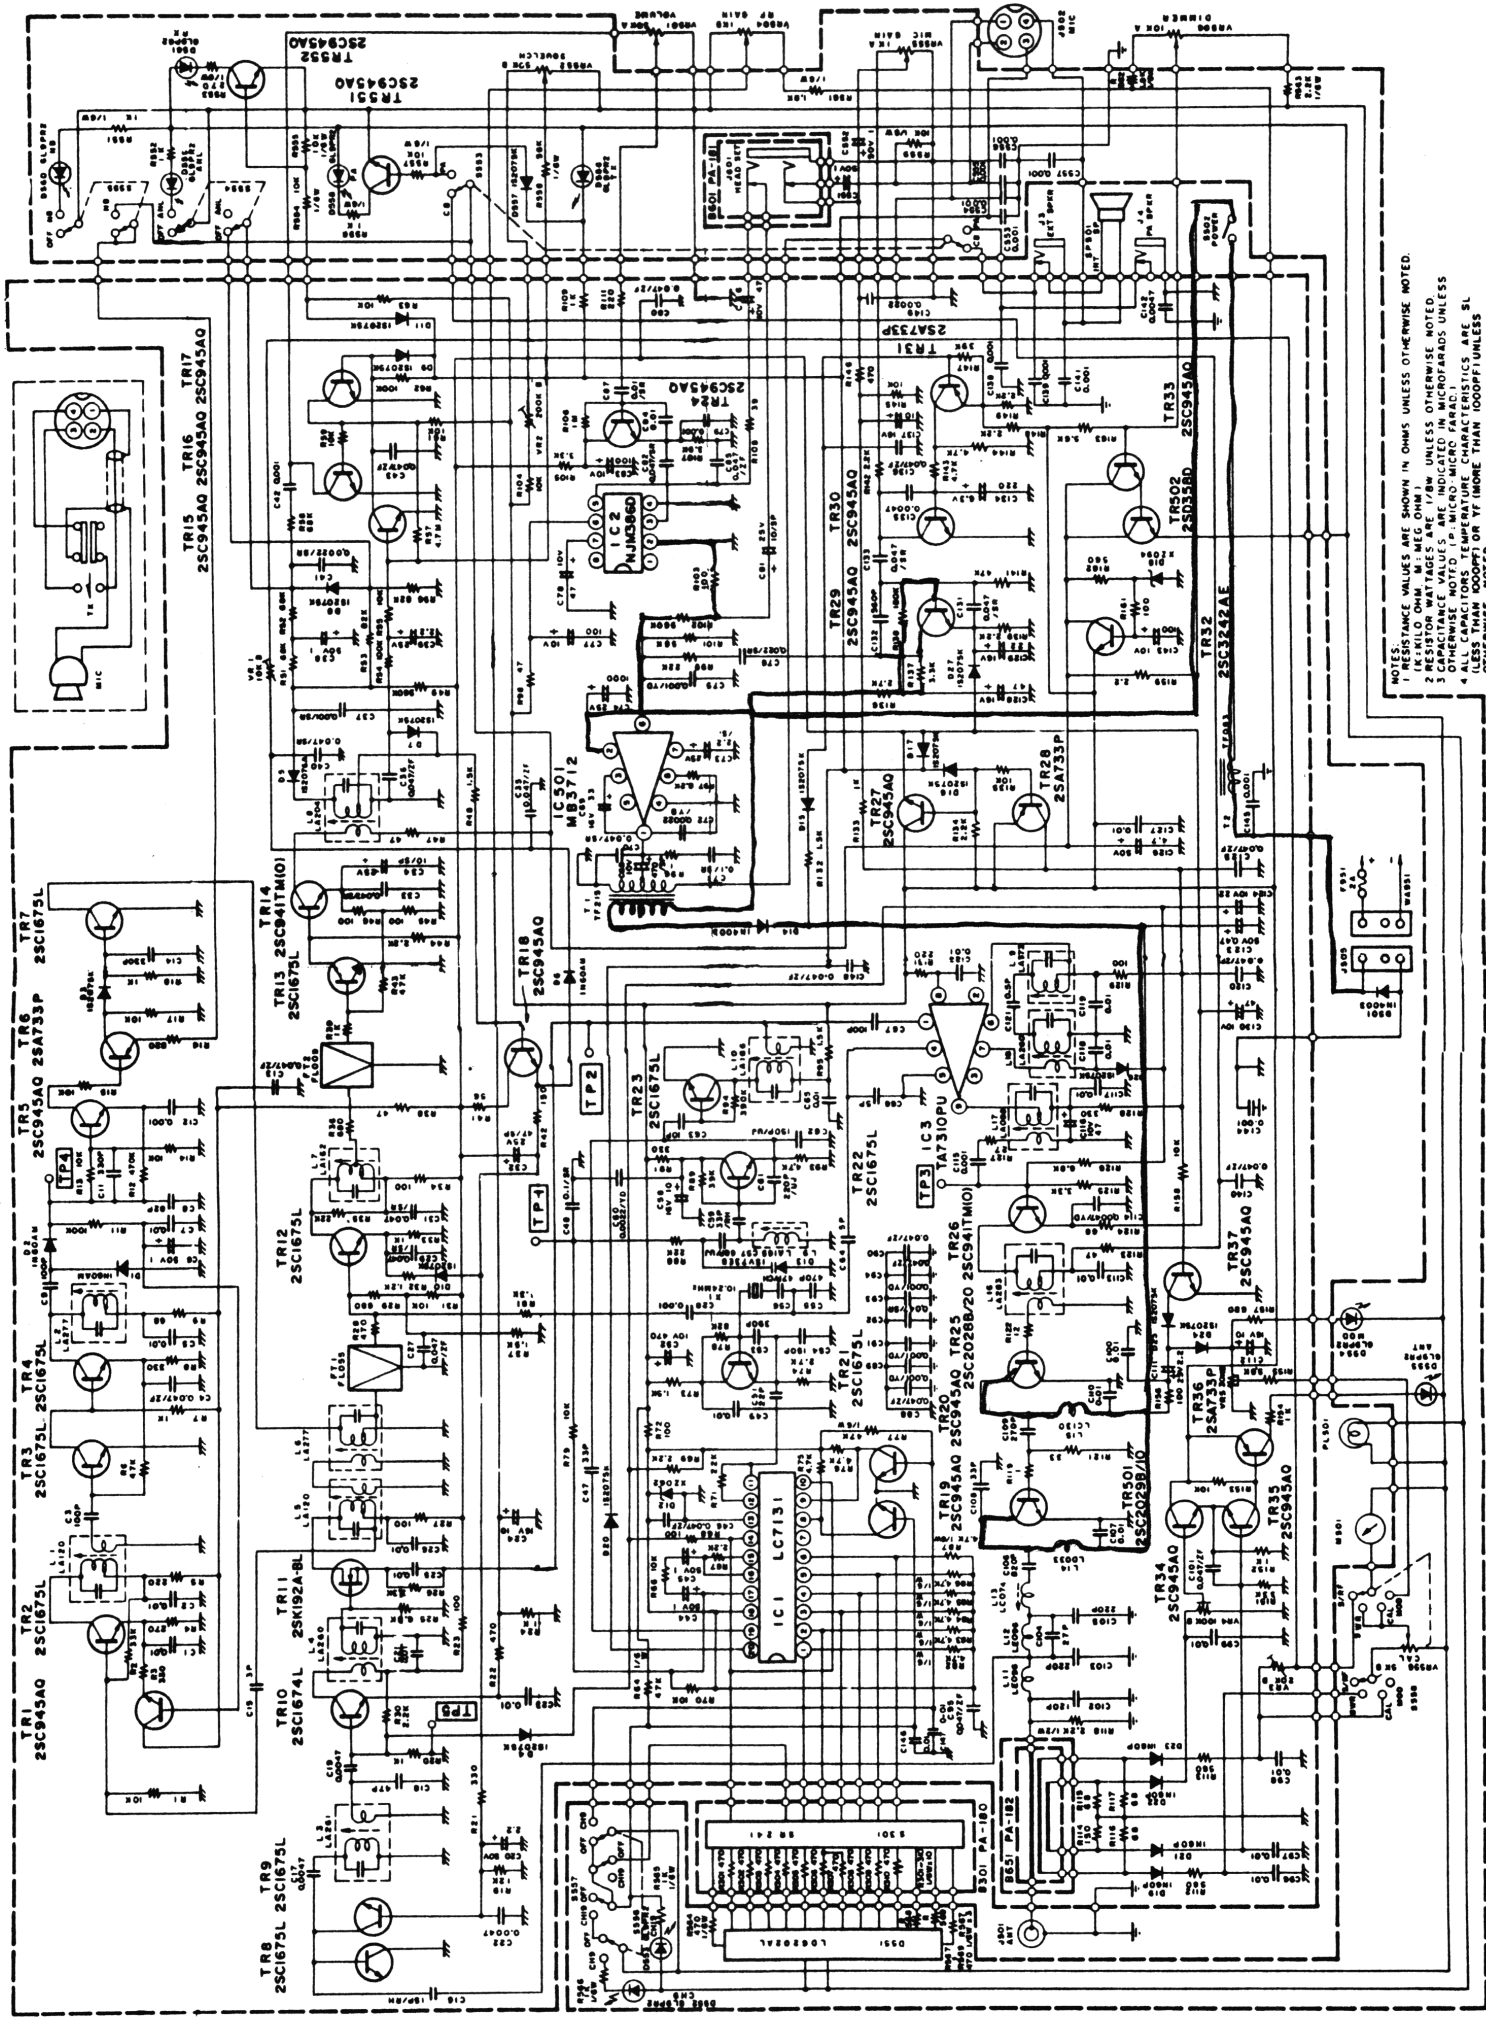

NOTE: RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED.  
 1 (K=KILO OHM, M=MEG OHM)  
 2 RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE NOTED.  
 3 CAPACITANCE VALUES ARE IN MICROFARADS UNLESS OTHERWISE NOTED.  
 4 ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE SL (LESS THAN 100PPM) OR Y (MORE THAN 100PPM) UNLESS OTHERWISE NOTED.