

18	25.895	26.215	26.535	26.855	27.495	27.815
19	25.905	26.225	26.545	26.865	27.505	27.825
20	25.925	26.245	26.565	26.885	27.525	27.845
21	25.935	26.255	26.575	26.895	27.535	27.855
22	25.945	26.265	26.585	26.905	27.545	27.865
23	25.975	26.295	26.615	26.935	27.575	
24	25.955	26.275	26.595	26.915	27.555	
25	25.965	26.285	26.605	26.925	27.565	
26	25.985	26.305	26.625	26.945	27.585	
27	25.995	26.315	26.635	26.955	27.595	
28	26.005		26.645			
29	26.015		26.655			
30	26.025		26.665			
31	26.035		26.675			
32	26.045		26.685			
33	26.055		26.695			
34	26.065		26.705			
35	26.075		26.715			
36	26.085		26.725			
37	26.095		26.735			
38	26.105		26.745			
39	26.115		26.755			
40	26.125		26.765			

- *EDITORS NOTE: I RECOMMEND USING A TA-27 INLINE RF PRE-AMPLIFIER WITH THIS RADIO AFTER THE ABOVE MOD. IT IS AVAILABLE FROM SELMAN ENTERPRISES. SEE ADDRESS AND PHONE # ELSEWHERE IN THIS VOLUME.*

SUPER GALAXY

EXTENDED TEN METER COVERAGE

- *R.M. TEDESCO*

THIS MODIFICATION GIVES EXTENDED COVERAGE ON BANDS "D" AND "E" FROM 28.355MHZ TO 28.945MHZ.

SUPER GALAXY

·OBTAIN A SPST SWITCH (AVAILABLE FROM SELMAN ENTERPRISES) OR USE AN EXISTING SWITCH.

1. REMOVE RADIO COVERS AND LOCATE IC5 AND IC7.
2. FIND A SUITABLE LOCATION AND MOUNT SWITCH.
3. CONNECT PIN 'A' TO PIN '12' OF IC5.
4. CONNECT PIN 'B' TO PIN '12' OF IC7.

SUPER GALAXY 10MTR F₀ CHART

CH.SEL.		CH.SEL.	
BAND D	BAND E	BAND D	BAND E
01	28.505	21	28.755
02	28.515	22	28.765
03	28.525	23	28.795
04	28.545	24	28.775
05	28.555	25	28.785
06	28.565	26 28.355	28.805
07	28.575	27 28.365	28.815
08	28.595	28 28.375	28.825
09	28.605	29 28.385	28.835
10	28.615	30 28.395	28.845
11	28.625	31 28.405	28.855
12	28.645	32 28.415	28.865
13	28.655	33 28.425	28.875
14	28.665	34 28.435	28.885
15	28.675	35 28.445	28.895
16	28.695	36 28.455	28.895
17	28.705	37 28.465	28.915
18	28.715	38 28.475	28.925
19	28.725	39 28.485	28.935
20	28.745	40 28.495	28.945

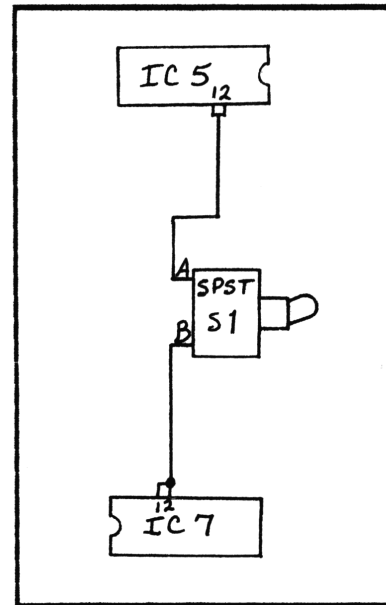


FIGURE 1. SUPER GALAXY