


# CIRCUIT DIAGRAM FOR COBRA 29WST

REVISION RECORD		
UPDATE TO ECN NO.	APPROVED:	DATE:
ECN-29WST-673		

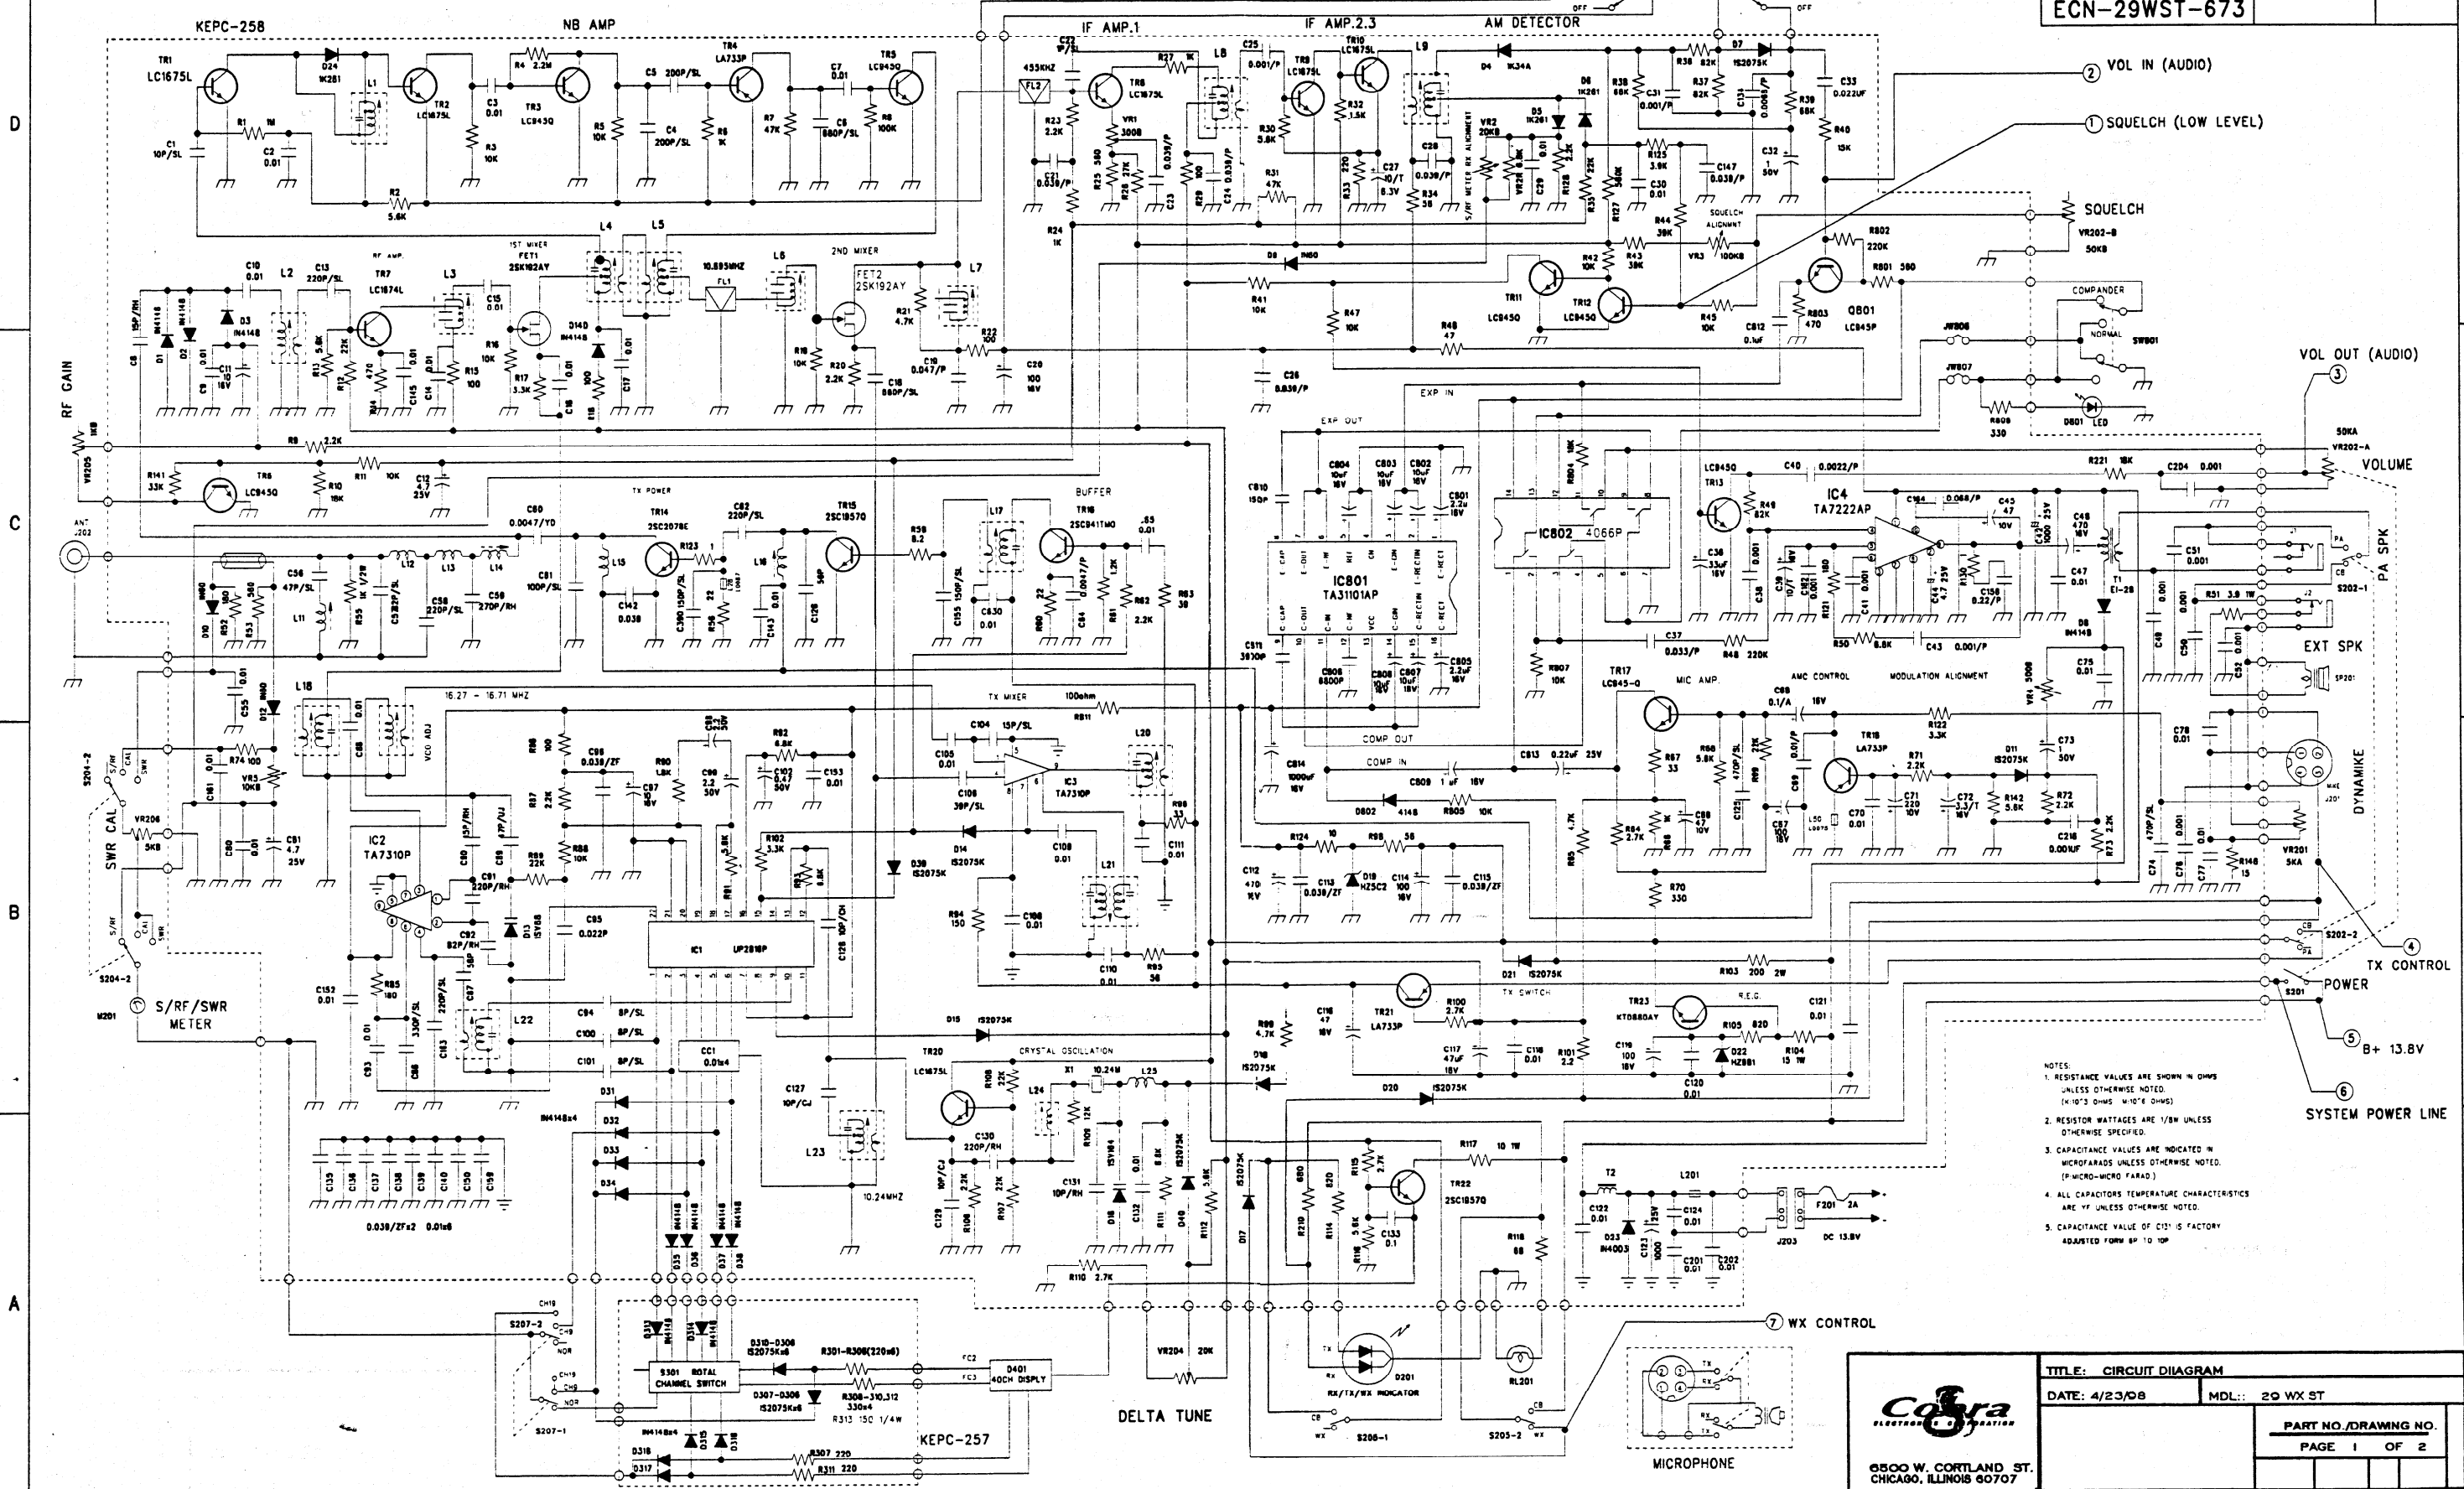

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=10<sup>3</sup> OHMS, M=10<sup>6</sup> OHMS)
  2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE SPECIFIED.
  3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED. (P=PICTO-MICRO FARAD)
  4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE YF UNLESS OTHERWISE NOTED.
  5. CAPACITANCE VALUE OF C121 IS FACTORY ADJUSTED 10% BY 10 10P

**CoBra**  
ELECTRONIC COMMUNICATIONS

6500 W. CORTLAND ST.  
CHICAGO, ILLINOIS 60707

TITLE: CIRCUIT DIAGRAM	DATE: 4/23/98	MDL: 29 WX ST
PART NO./DRAWING NO.		PAGE 1 OF 2