


SCHEMATIC DIAGRAM

B001 PB-130

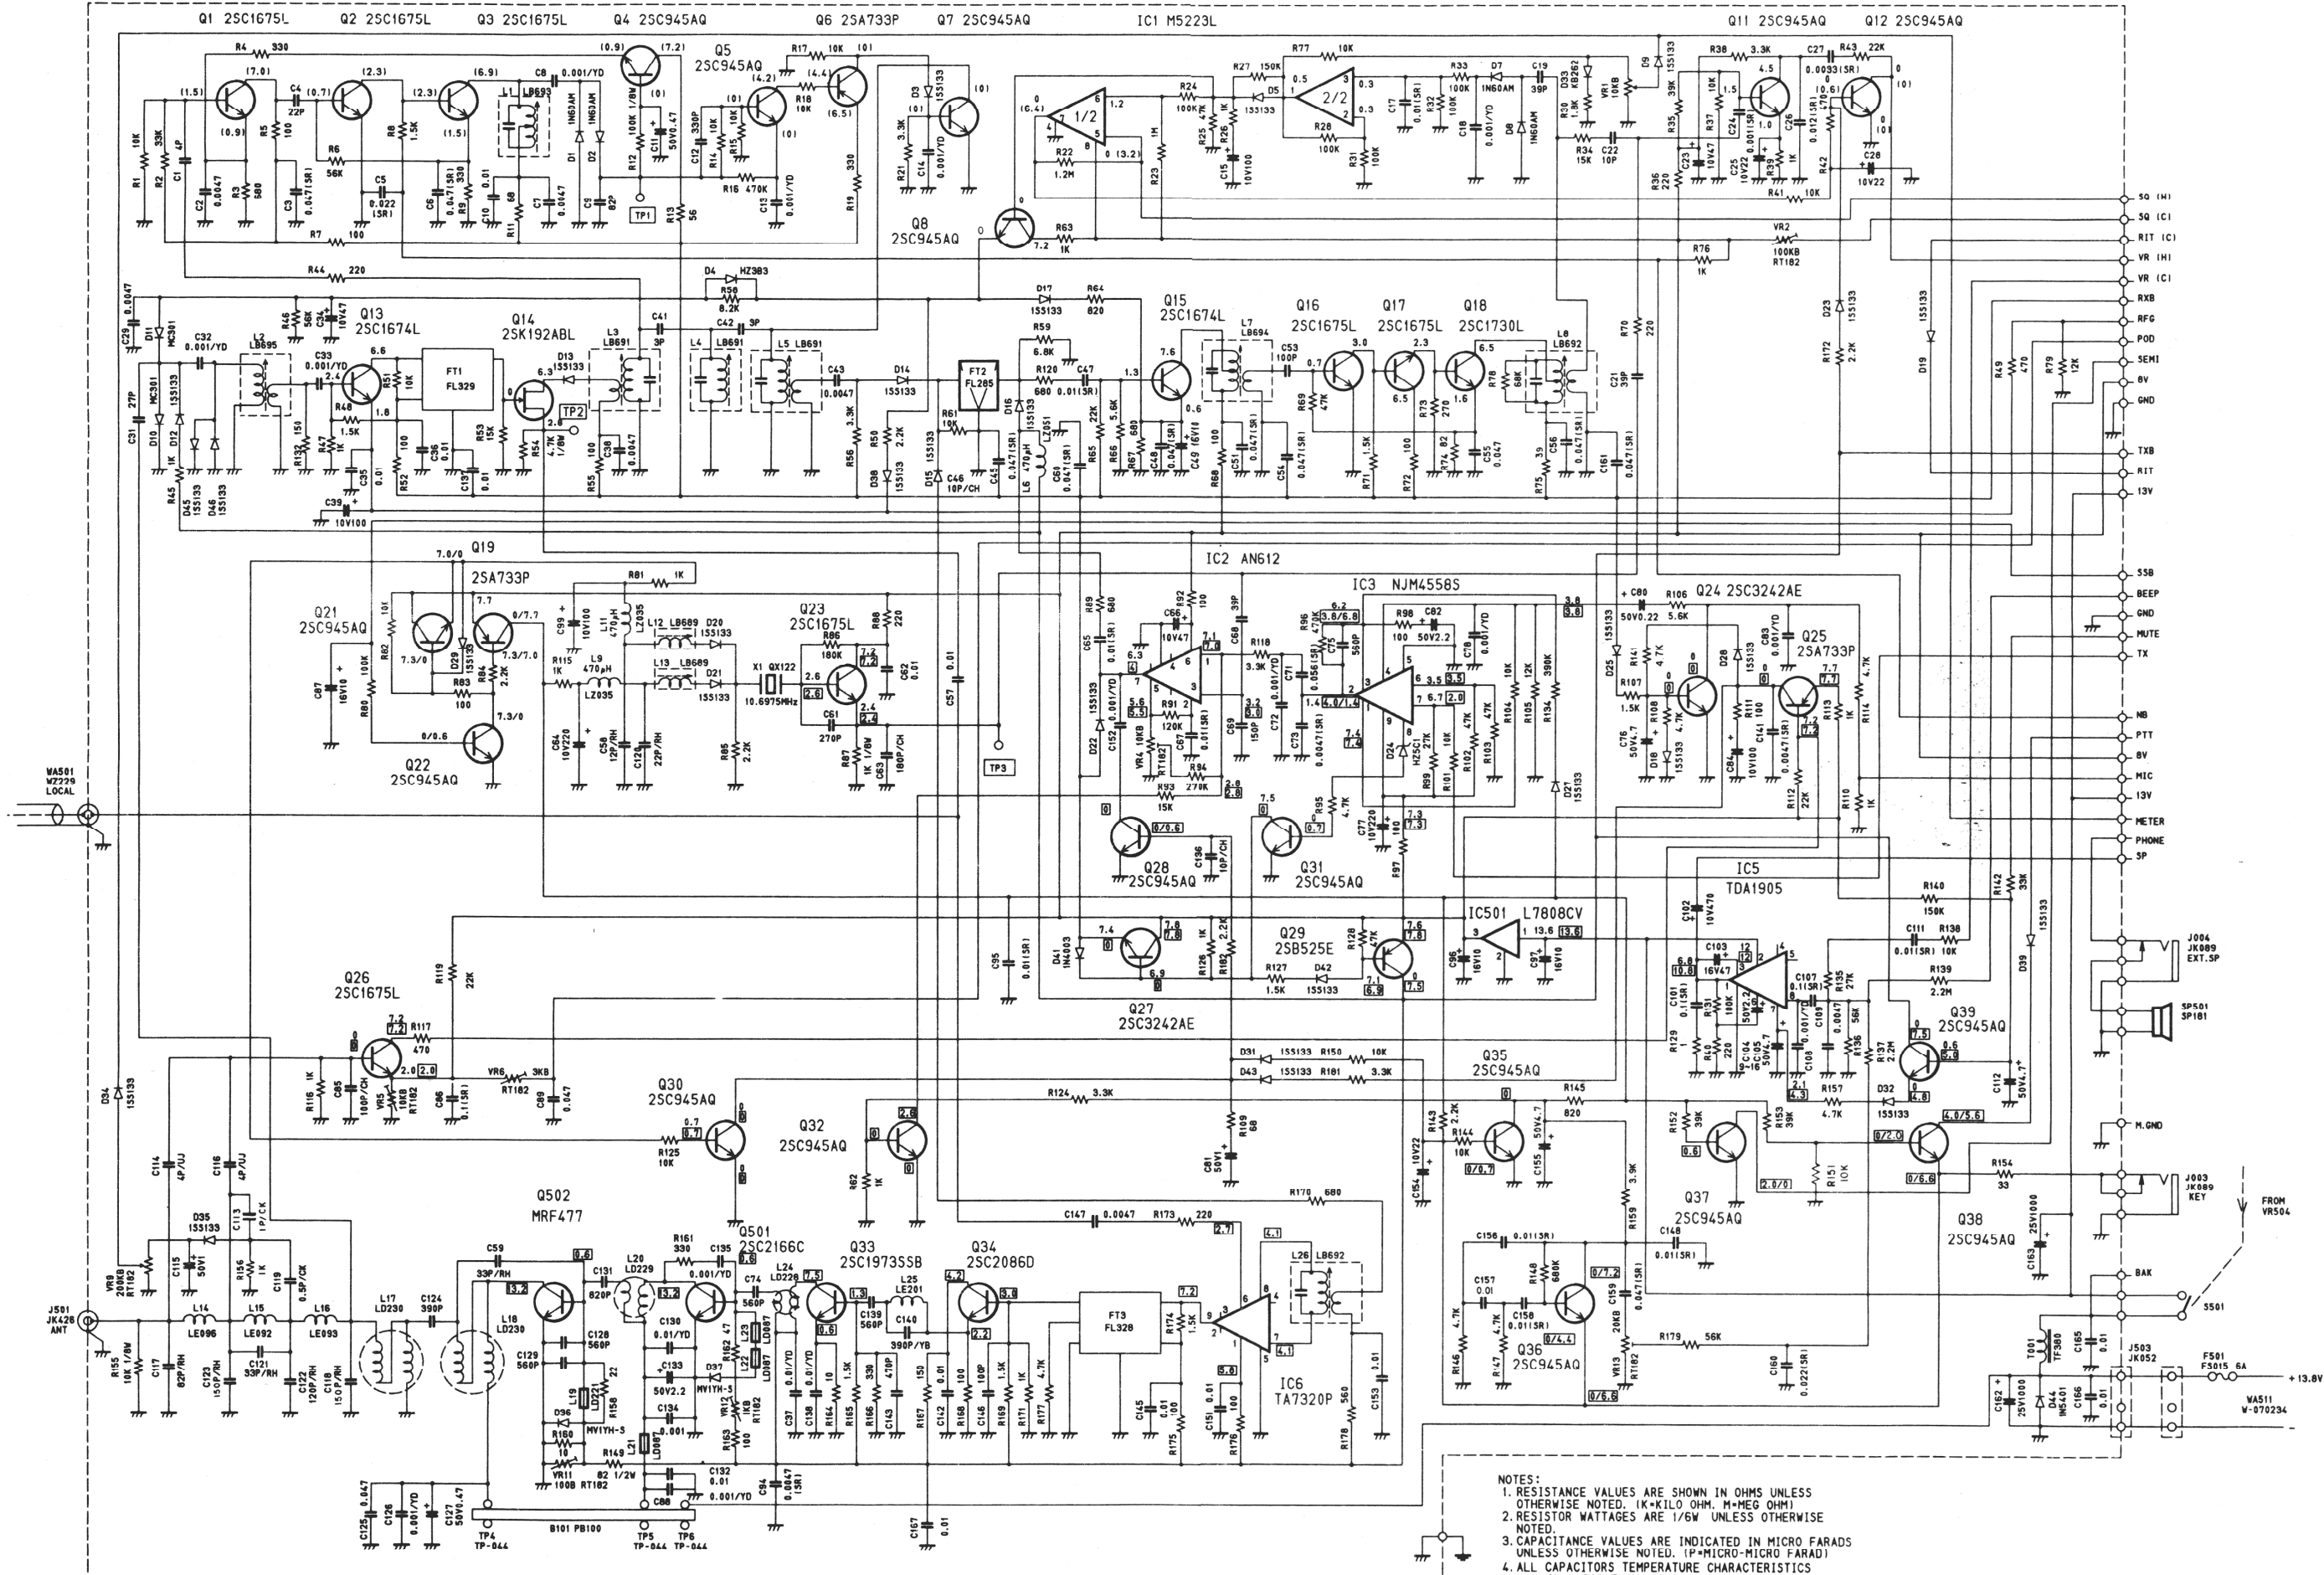

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
 2. RESISTOR WATTAGES ARE 1/6W UNLESS OTHERWISE NOTED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=MICRO-MICRO FARAD)
 4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE SL (LESS THAN 1000PF), 2F (0.047F) OR YF (0.001F-0.039F) UNLESS OTHERWISE NOTED.
 5. DC VOLTAGE IN \square SHOWS TX CONDITION. (SSB/CW)
 6. DC VOLTAGE IN \square SHOWS RX CONDITION. (SSB/CW)
 7. DC VOLTAGE IN \square SHOWS RX CONDITION UNDER OPERATION OF EACH FUNCTION.