



# SCHEMATIC DIAGRAM

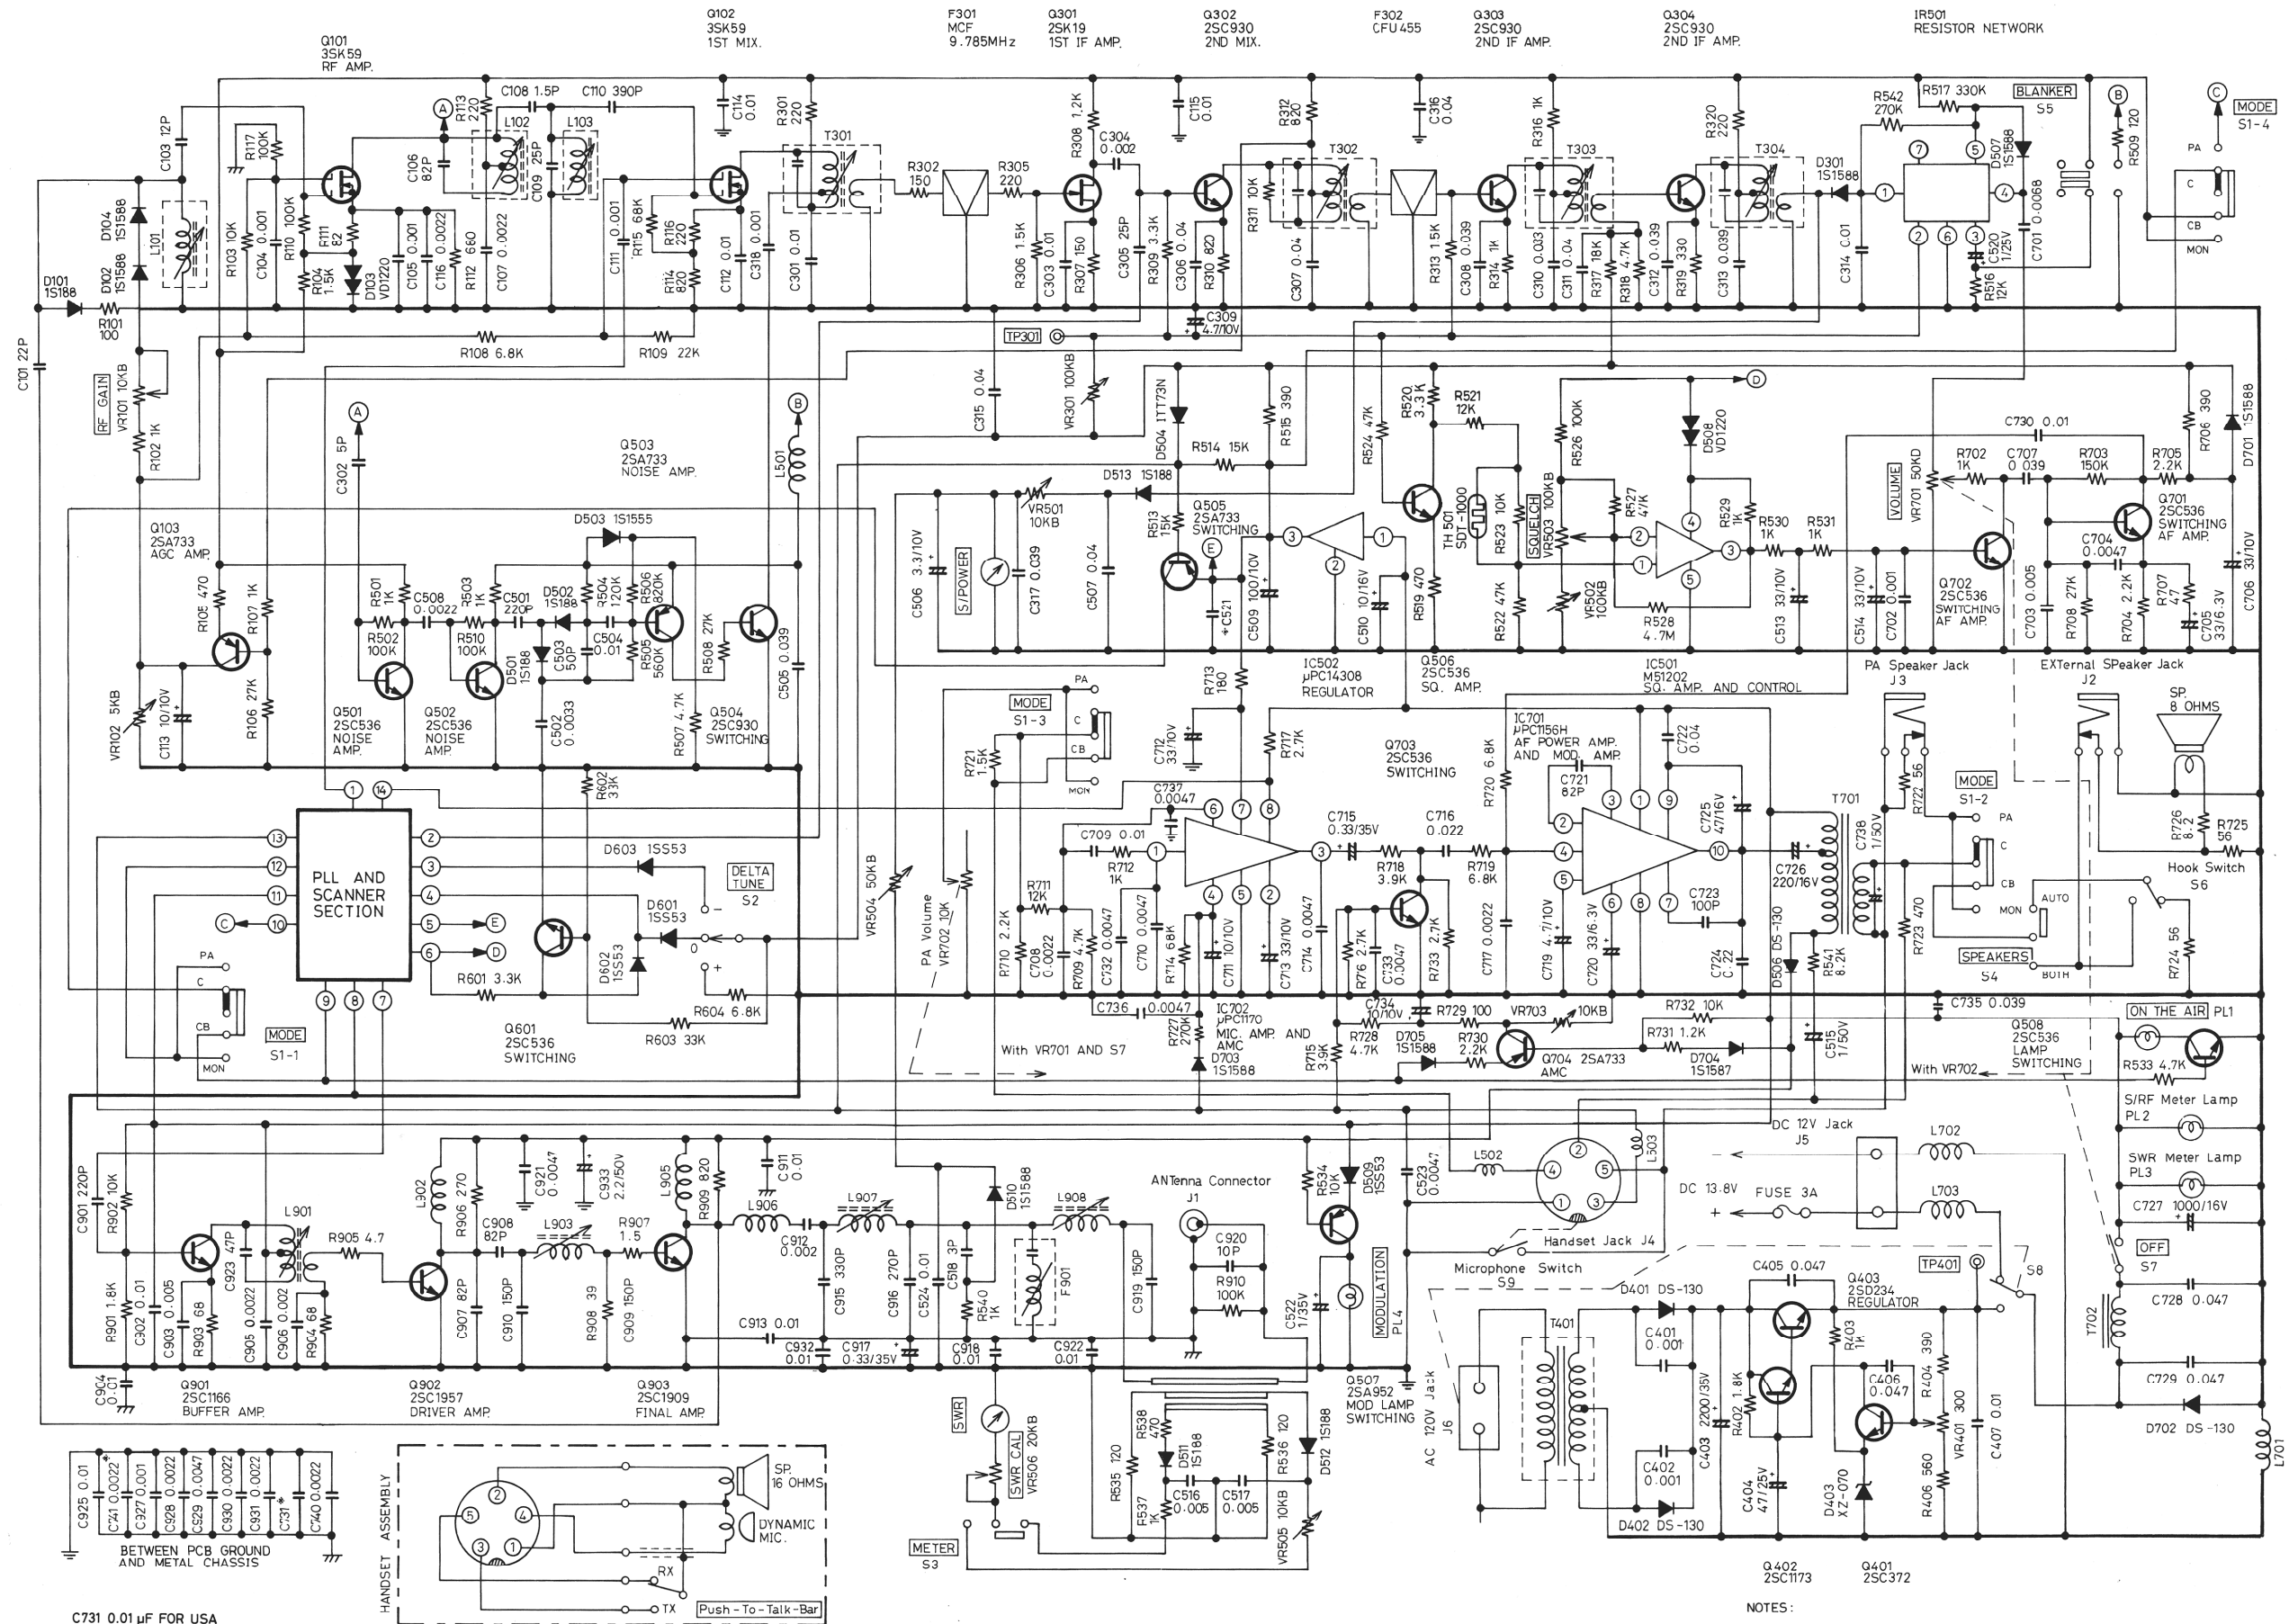

C925 0.01  
C926 0.0022  
C927 0.001  
C928 0.0022  
C929 0.0047  
C930 0.0022  
C931 0.0022  
C932 0.0022  
C933 0.0022  
C934 0.0022  
C935 0.0022  
C936 0.0022  
C937 0.0022  
C938 0.0022  
C939 0.0022  
C940 0.0022  
C941 0.0022  
C942 0.0022  
C943 0.0022  
C944 0.0022  
C945 0.0022  
C946 0.0022  
C947 0.0022  
C948 0.0022  
C949 0.0022  
C950 0.0022  
C951 0.0022  
C952 0.0022  
C953 0.0022  
C954 0.0022  
C955 0.0022  
C956 0.0022  
C957 0.0022  
C958 0.0022  
C959 0.0022  
C960 0.0022  
C961 0.0022  
C962 0.0022  
C963 0.0022  
C964 0.0022  
C965 0.0022  
C966 0.0022  
C967 0.0022  
C968 0.0022  
C969 0.0022  
C970 0.0022  
C971 0.0022  
C972 0.0022  
C973 0.0022  
C974 0.0022  
C975 0.0022  
C976 0.0022  
C977 0.0022  
C978 0.0022  
C979 0.0022  
C980 0.0022  
C981 0.0022  
C982 0.0022  
C983 0.0022  
C984 0.0022  
C985 0.0022  
C986 0.0022  
C987 0.0022  
C988 0.0022  
C989 0.0022  
C990 0.0022  
C991 0.0022  
C992 0.0022  
C993 0.0022  
C994 0.0022  
C995 0.0022  
C996 0.0022  
C997 0.0022  
C998 0.0022  
C999 0.0022  
C1000 0.0022

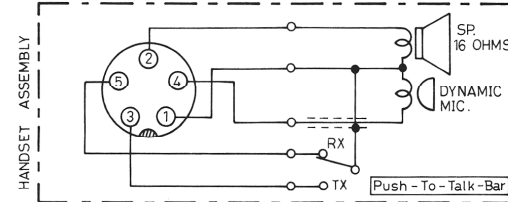

C521 0.0022 μF FOR USA MODELS  
0.01 μF FOR CANADA MODELS

**NOTES:**

1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED (K = 1,000 OHMS, M = 1,000K OHMS).
2. CAPACITANCE VALUES ARE SHOWN IN MICROFARADS UNLESS OTHERWISE NOTED (P = MICRO-MICROFARADS).
3. [MODE] MARKED SWITCHES (S1-1 THRU S1-4) FUNCTION SIMULTANEOUSLY.
4. FOR PLL AND SCANNER SECTION, REFER TO PAGE 53.