


GRANT - TX Power Sw. Mod
by D.G.

1. Rewire ANL/NB or Bright/Dim switch permanently ON (Hardwire point to point on PCB.)
2. Rewire switch as shown below to etch side of PCB. Check to make sure that all pins on switch are isolated.

Push Button switch shown in OUT position, LOW POWER.
GREEN LED should be ON, denote O.K. to use R.F. Amplifier.

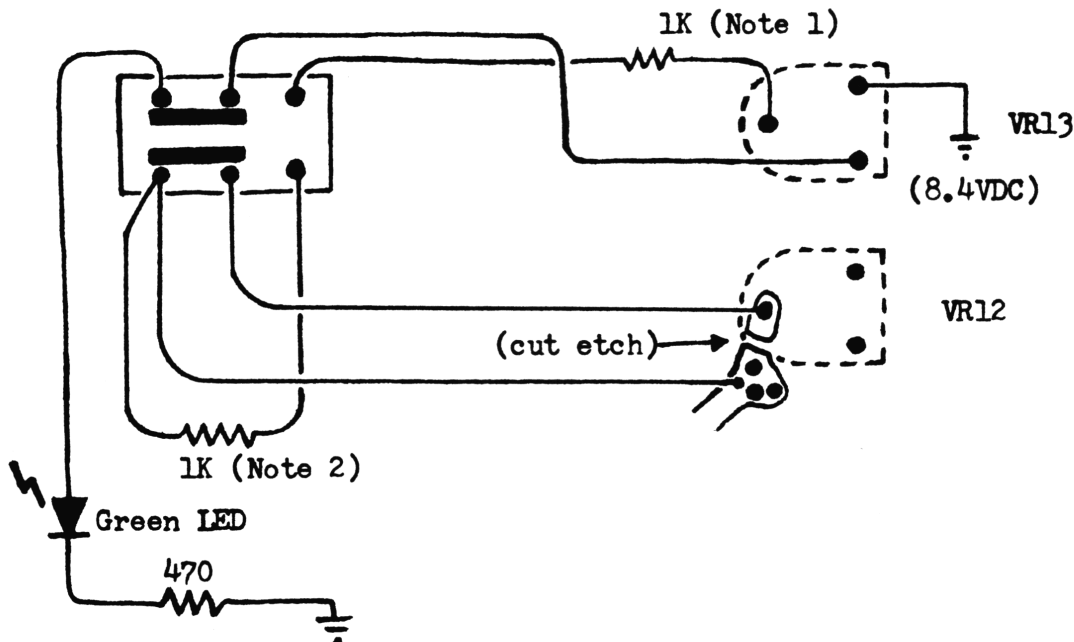

3. Install the Green LED directly above RF/S Meter. (NOTE: Will CAREFULLY have to drill a hole for this.)
4. Switch to OUT position, Green LED - ON! Adjust for following:
VR13 - 3.5 to 3.8W in AM Mode
VR12 - 12 to 14W in SSB Mode. (Maximum Mike Gain)

(All resistors are $\frac{1}{2}$ W 5%).....

Note 1: This value gives 10W AM in High Power. (May be varied to suit your individual needs.)

Note 2: Value gives 25W PEP on SSB. (Also may be varied to suit.)

Remember: Green LED ON - O.K. to use RF Amplifier.

OR Make up a label as below, mount above LED. Use on Jackson too!

C A U T I O N
DO NOT TURN ON AMP
IF THIS LITE IS NOT ON
↓