


# SCHEMATIC DIAGRAM



NOTES:

1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED (K=1,000 OHMS, M=1,000 KHMHS).
2. CAPACITANCE VALUES ARE SHOWN IN MICROFARADS UNLESS OTHERWISE NOTED (P=MICRO-MICROFARADS).
3. SWITCHES (S7-1 AND S7-2) ARE INCLUDED IN RELAY.
4. [AM FM CB] MARKED SWITCHES (S3-1 THRU S3-4) FUNCTION SIMULTANEOUSLY.
5. S3-3 AND S3-4 ARE SHOWN IN RADIO SECTION SCHEMATIC DIAGRAM.
6. CONNECTIONS BY USING MULTI-PIN CONNECTORS ARE AS FOLLOWS. REFER TO BOTH SCHEMATIC DIAGRAMS.
  - P3 TO J3
  - P4 TO J4
  - P5 TO J5
  - P6 TO J6
  - P7 TO J7
7. ALL VALUES AND RATINGS ARE SUBJECT TO CHANGE FOR IMPROVEMENT WITHOUT NOTICE.

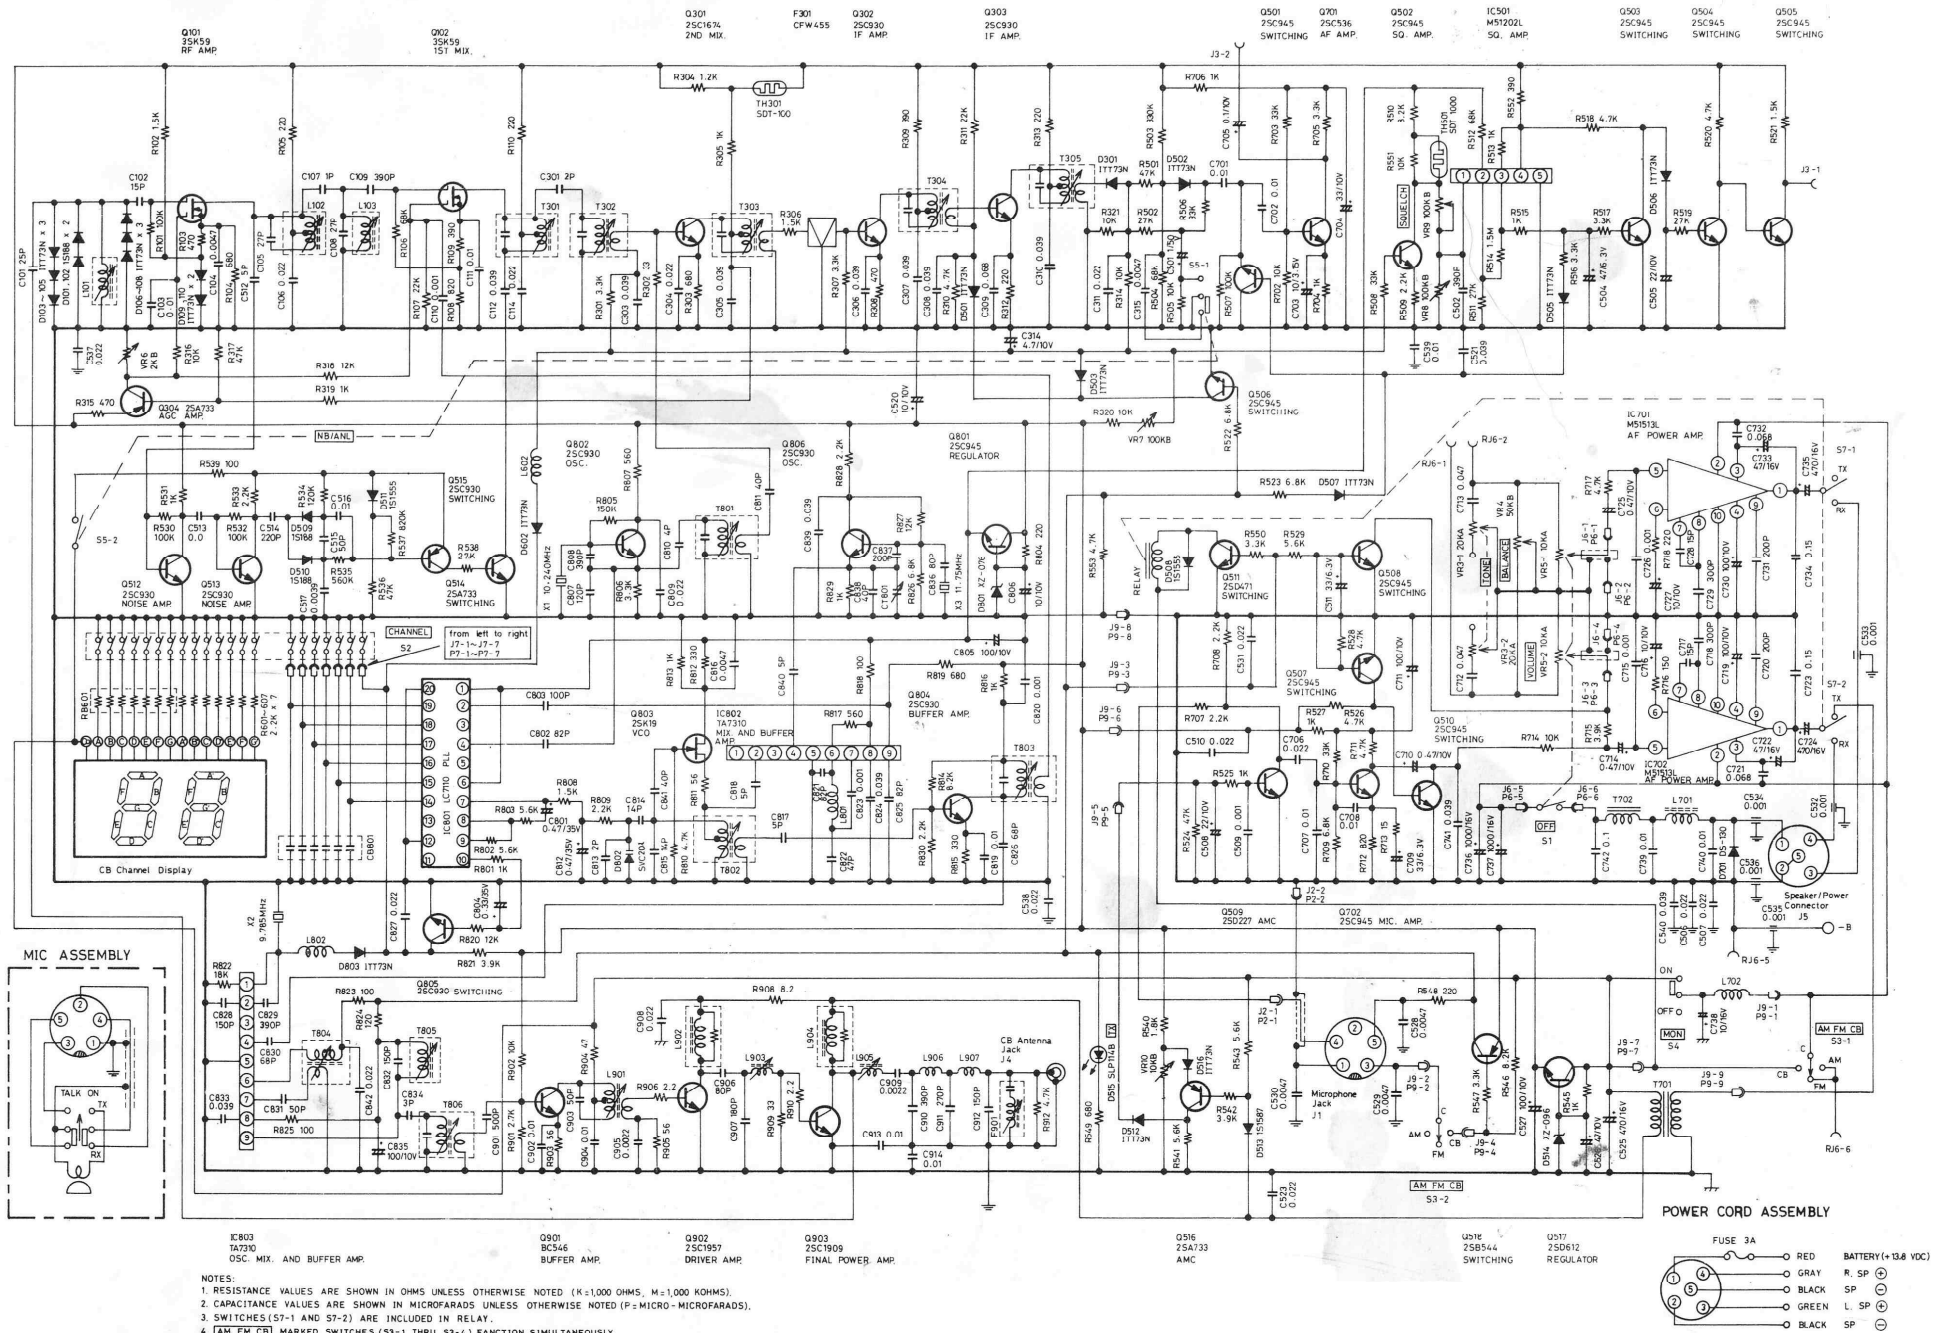