


NEW PRODUCT

SECRET CB's JACKSON NOVICE KITS

NOVICE "A": Gives coverage from 26.515-28.755MHz, extended 'slide'.

NOVICE "B": Gives coverage from 26.965-29.205MHz, extended 'slide'.

... Installation: Remove present X2, replace with new xtal. DO NOT CUT XTAL LEADS. Sleeve leads before soldering into place. Bend xtal towards front of chassis. Unsolder the unbanded side of D38, lift upright. Solder new 'SUPER SLIDE' into hole where diode was, the other side is soldered to D38. If additional slide is needed, adjust VR15.

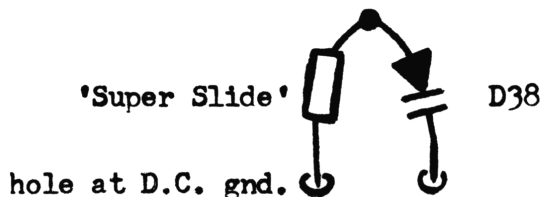

Realign L14, L15, and L16 for desired offsets. L12 and L13 will have to be slightly realigned, in about all units for complete coverage. To align TX and RX sections use Secret CB Volume 20 for a guide. (Special Note: Slight re-alignment was needed on initial units....)

NOVICE "A" FREQUENCY CHART

A -Band		B -Band		C -Band		D -Band		E -Band	
Channel	MHz Frequency	Channel	MHz Frequency	Channel	MHz Frequency	Channel	MHz Frequency	Channel	MHz Frequency
1	26.515	1	26.965	1	27.415	1	27.865	1	28.315
2	26.525	2	26.975	2	27.425	2	27.875	2	28.325
3	26.535	3	26.985	3	27.435	3	27.885	3	28.335
4	26.555	4	27.005	4	27.455	4	27.905	4	28.355
5	26.565	5	27.015	5	27.465	5	27.915	5	28.365
6	26.575	6	27.025	6	27.475	6	27.925	6	28.375
7	26.585	7	27.035	7	27.485	7	27.935	7	28.385
8	26.605	8	27.055	8	27.505	8	27.955	8	28.405
9	26.615	9	27.065	9	27.515	9	27.965	9	28.415
10	26.625	10	27.075	10	27.525	10	27.975	10	28.425
11	26.635	11	27.085	11	27.535	11	27.985	11	28.435
12	26.655	12	27.105	12	27.555	12	28.005	12	28.455
13	26.665	13	27.115	13	27.565	13	28.015	13	28.465
14	26.675	14	27.125	14	27.575	14	28.025	14	28.475
15	26.685	15	27.135	15	27.585	15	28.035	15	28.485
16	26.705	16	27.155	16	27.605	16	28.055	16	28.505
17	26.715	17	27.165	17	27.615	17	28.065	17	28.515
18	26.725	18	27.175	18	27.625	18	28.075	18	28.525
19	26.735	19	27.185	19	27.635	19	28.085	19	28.535
20	26.755	20	27.205	20	27.655	20	28.105	20	28.555
21	26.765	21	27.215	21	27.665	21	28.115	21	28.565
22	26.775	22	27.225	22	27.675	22	28.125	22	28.575
23	26.805	23	27.255	23	27.705	23	28.155	23	28.605
24	26.785	24	27.235	24	27.685	24	28.135	24	28.585
25	26.795	25	27.245	25	27.695	25	28.145	25	28.595
26	26.815	26	27.265	26	27.715	26	28.165	26	28.615
27	26.825	27	27.275	27	27.725	27	28.175	27	28.625
28	26.835	28	27.285	28	27.735	28	28.185	28	28.635
29	26.845	29	27.295	29	27.745	29	28.195	29	28.645
30	26.855	30	27.305	30	27.755	30	28.205	30	28.655
31	26.865	31	27.315	31	27.765	31	28.215	31	28.665
32	26.875	32	27.325	32	27.775	32	28.225	32	28.675
33	26.885	33	27.335	33	27.785	33	28.235	33	28.685
34	26.895	34	27.345	34	27.795	34	28.245	34	28.695
35	26.905	35	27.355	35	27.805	35	28.255	35	28.705
36	26.915	36	27.365	36	27.815	36	28.265	36	28.715
37	26.925	37	27.375	37	27.825	37	28.275	37	28.725
38	26.935	38	27.385	38	27.835	38	28.285	38	28.735
39	26.945	39	27.395	39	27.845	39	28.295	39	28.745
40	26.955	40	27.405	40	27.855	40	28.305	40	28.755

NOVICE "B" FREQUENCY CHART

A -Band		B -Band		C -Band		D -Band		E -Band	
Channel	MHz Frequency	Channel	MHz Frequency	Channel	MHz Frequency	Channel	MHz Frequency	Channel	MHz Frequency
1	26.965	1	27.415	1	28.315	1	28.765	1	28.965
2	26.975	2	27.425	2	28.775	2	28.325	2	28.775
3	26.985	3	27.435	3	28.785	3	28.335	3	28.785
4	27.005	4	27.455	4	28.795	4	28.355	4	28.805
5	27.015	5	27.465	5	28.805	5	28.365	5	28.815
6	27.025	6	27.475	6	28.815	6	28.375	6	28.825
7	27.035	7	27.485	7	28.825	7	28.385	7	28.835
8	27.055	8	27.505	8	28.845	8	28.405	8	28.855
9	27.065	9	27.515	9	28.855	9	28.415	9	28.865
10	27.075	10	27.525	10	28.865	10	28.425	10	28.875
11	27.085	11	27.535	11	28.875	11	28.435	11	28.885
12	27.105	12	27.555	12	28.895	12	28.455	12	28.905
13	27.115	13	27.565	13	28.905	13	28.465	13	28.915
14	27.125	14	27.575	14	28.915	14	28.475	14	28.925
15	27.135	15	27.585	15	28.925	15	28.485	15	28.935
16	27.155	16	27.605	16	28.945	16	28.505	16	28.955
17	27.165	17	27.615	17	28.955	17	28.515	17	28.965
18	27.175	18	27.625	18	28.965	18	28.525	18	28.975
19	27.185	19	27.635	19	28.975	19	28.535	19	28.985
20	27.205	20	27.655	20	28.995	20	28.555	20	28.995
21	27.215	21	27.665	21	29.005	21	28.565	21	29.005
22	27.225	22	27.675	22	29.015	22	28.575	22	29.015
23	27.255	23	27.705	23	29.025	23	28.585	23	29.025
24	27.235	24	27.685	24	29.035	24	28.595	24	29.035
25	27.245	25	27.695	25	29.045	25	28.605	25	29.045
26	27.265	26	27.715	26	29.055	26	28.615	26	29.055
27	27.275	27	27.725	27	29.065	27	28.625	27	29.065
28	27.285	28	27.735	28	29.075	28	28.635	28	29.075
29	27.295	29	27.745	29	29.085	29	28.645	29	29.085
30	27.305	30	27.755	30	29.095	30	28.655	30	29.095
31	27.315	31	27.765	31	29.105	31	28.665	31	29.105
32	27.325	32	27.775	32	29.115	32	28.675	32	29.115
33	27.335	33	27.785	33	29.125	33	28.685	33	29.125
34	27.345	34	27.795	34	29.135	34	28.695	34	29.135
35	27.355	35	27.805	35	29.145	35	28.705	35	29.145
36	27.365	36	27.815	36	29.155	36	28.715	36	29.155
37	27.375	37	27.825	37	29.165	37	28.725	37	29.165
38	27.385	38	27.835	38	29.175	38	28.735	38	29.175
39	27.395	39	27.845	39	29.185	39	28.745	39	29.185
40	27.405	40	27.855	40	29.195	40	28.755	40	29.195

Order these new Jackson Novice Kits @ \$9.00 ea. SELMAN ENTERPRISES, P.O. Box 8189, Corpus Christi, TX 78412 or Call 512/853-2935.