

SCHEMATIC DIAGRAM


IC1 (RX)	(TX)
1	7.77
2	0
3	0
4	0
5	4.98
6	0
7	0
8	8.03
9	7.28
10	3.95

IC2 (RX)	(TX)
1	5.02
2	.51
3	.50
4	5.02
5	.50
6	.50
7	5.03
8	5.03
9	0
10	2.02
11	5.03
12	2.41
13	2.56
14	2.42
15	5.04
16	5.03
17	2.78
18	2.78
19	4.98
20	5.03
21	0
22	2.53

IC3 (RX)	(TX)
1	2.89
2	3.25
3	3.25
4	0
5	5.85
6	7.36
7	7.43

IC4 (RX)	(TX)
1	13.05
2	6.69
3	0
4	0
5	1.80
6	1.79
7	0
8	0
9	2.88
10	13.72

IC5 (RX)	(TX)
1	8.04
2	13.72
3	8.05
4	0
5	13.71
6	8.04
7	0
8	.11

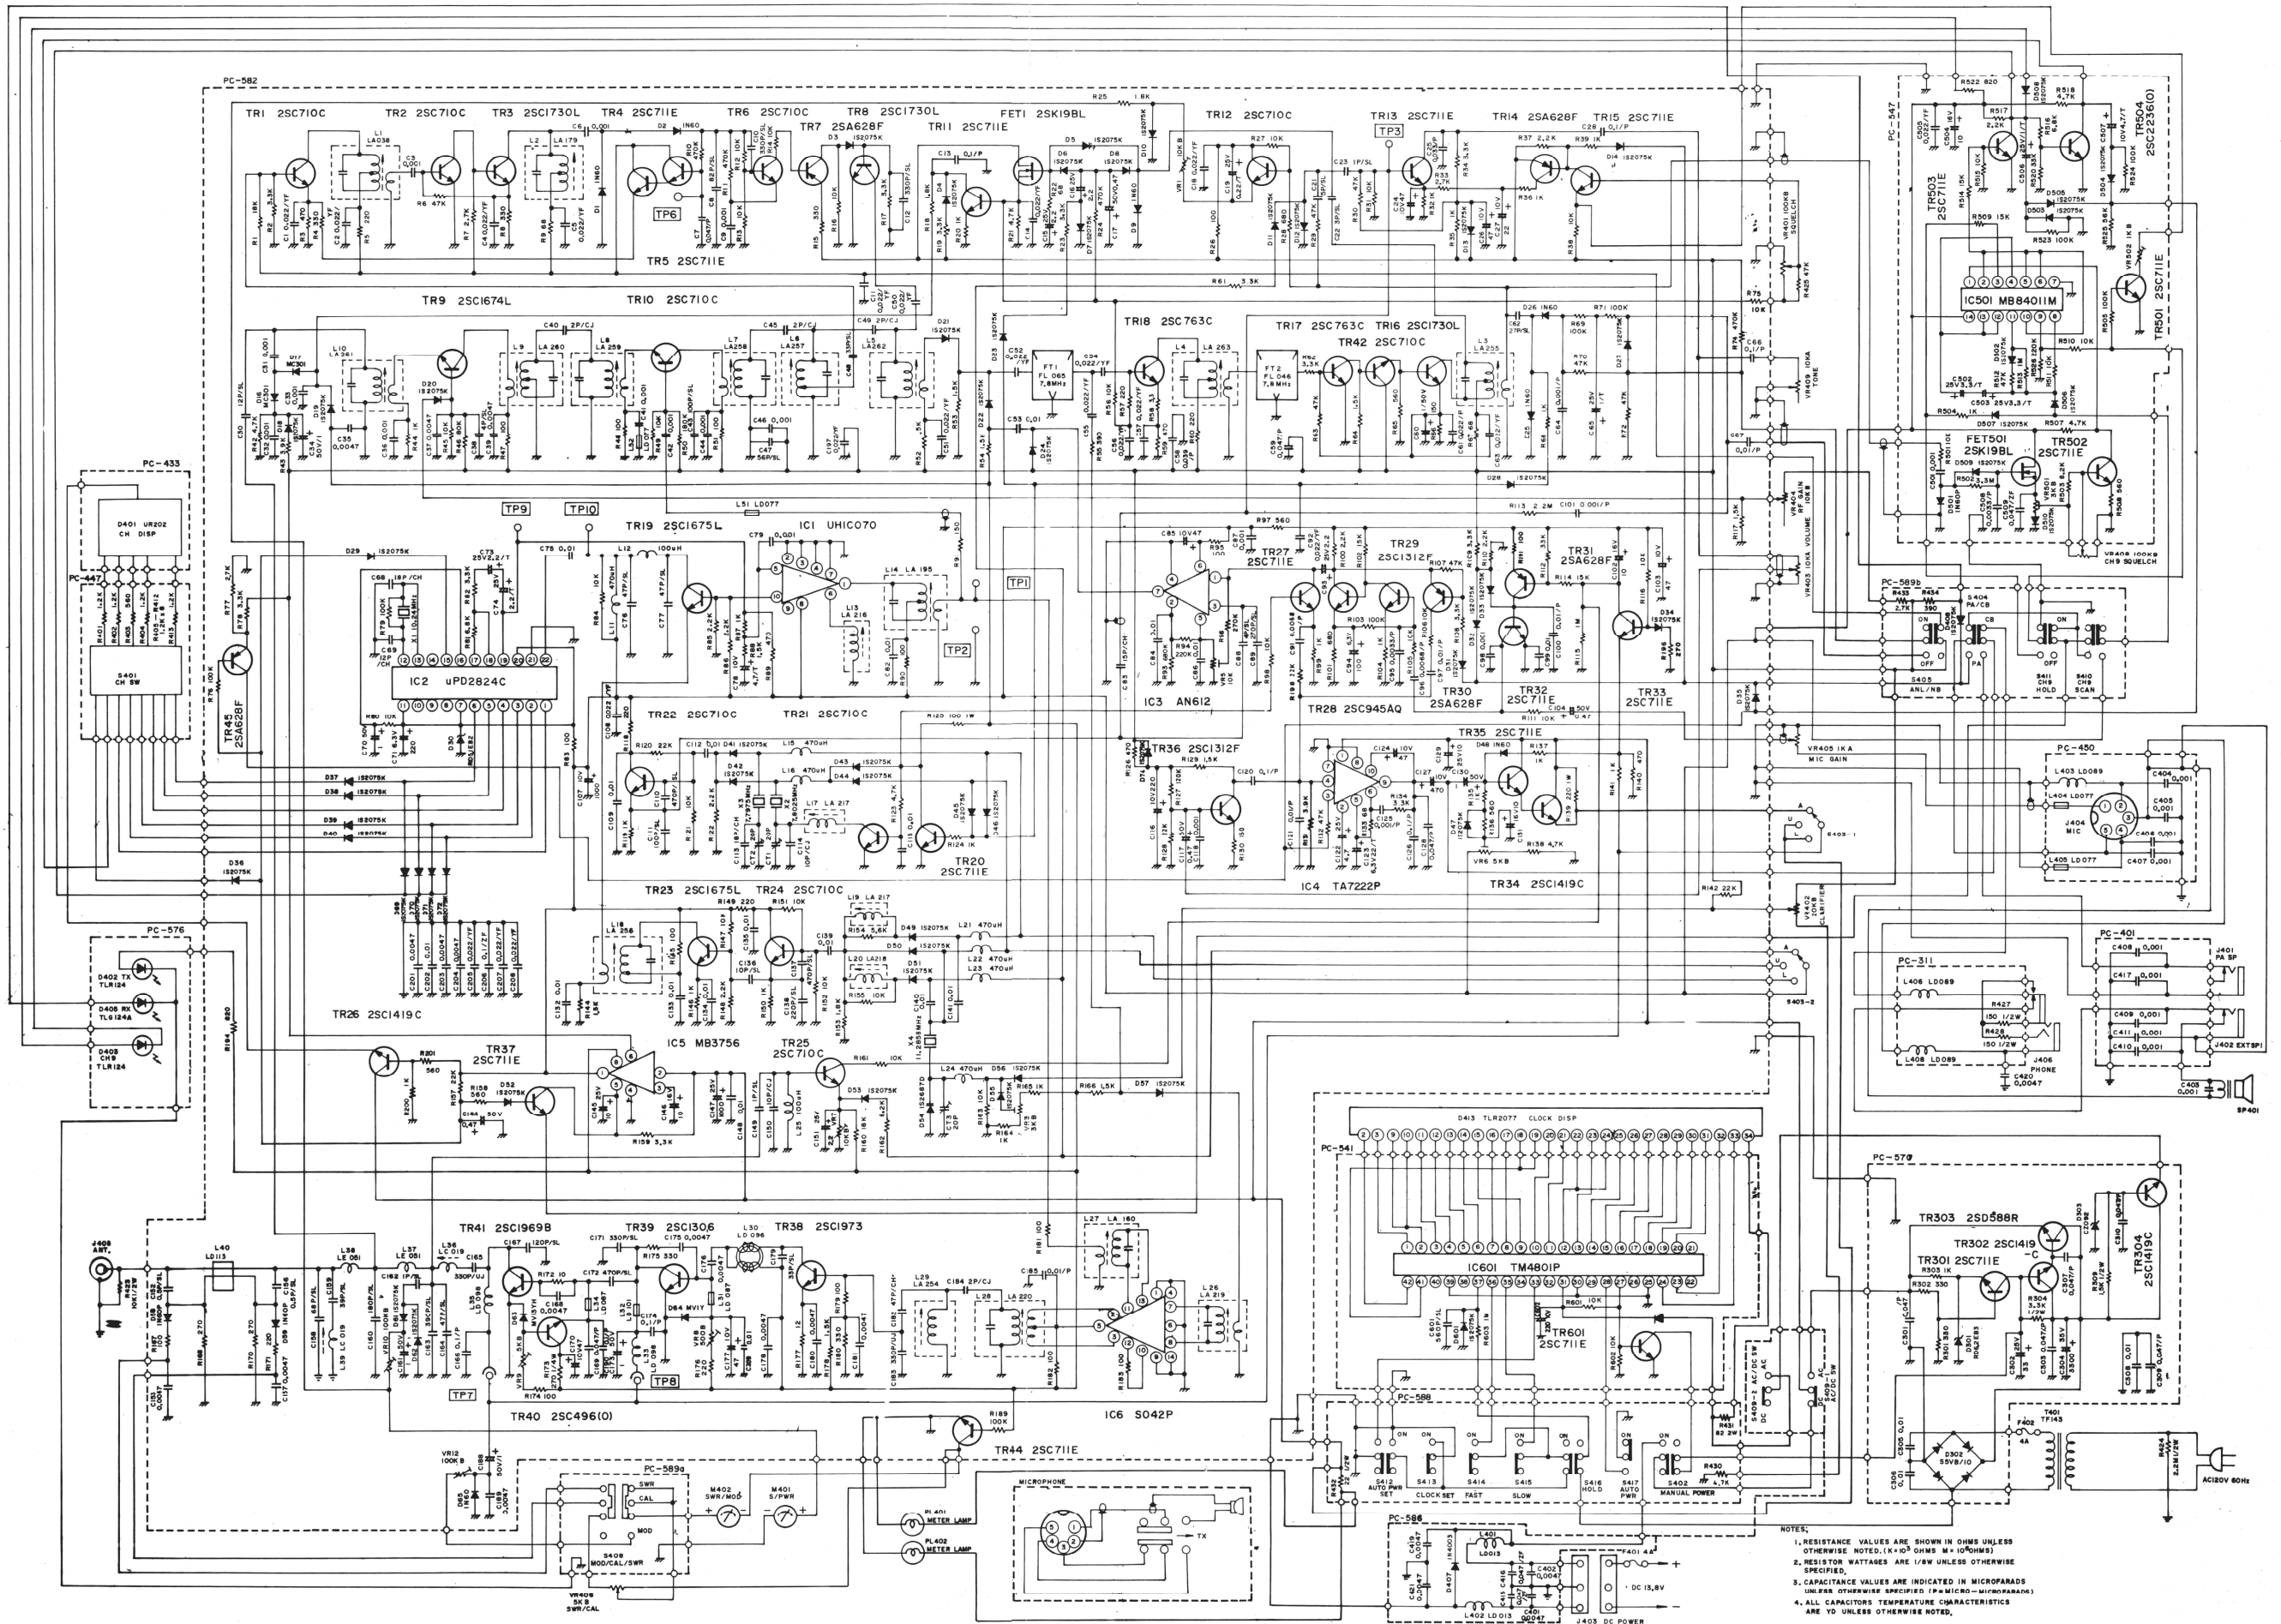

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=10³ OHMS M=10⁶ OHMS)
 2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE SPECIFIED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE SPECIFIED (P=PICTO-MICROFARADS)
 4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE 50 UNLESS OTHERWISE NOTED.