


SCHEMATIC DIAGRAM

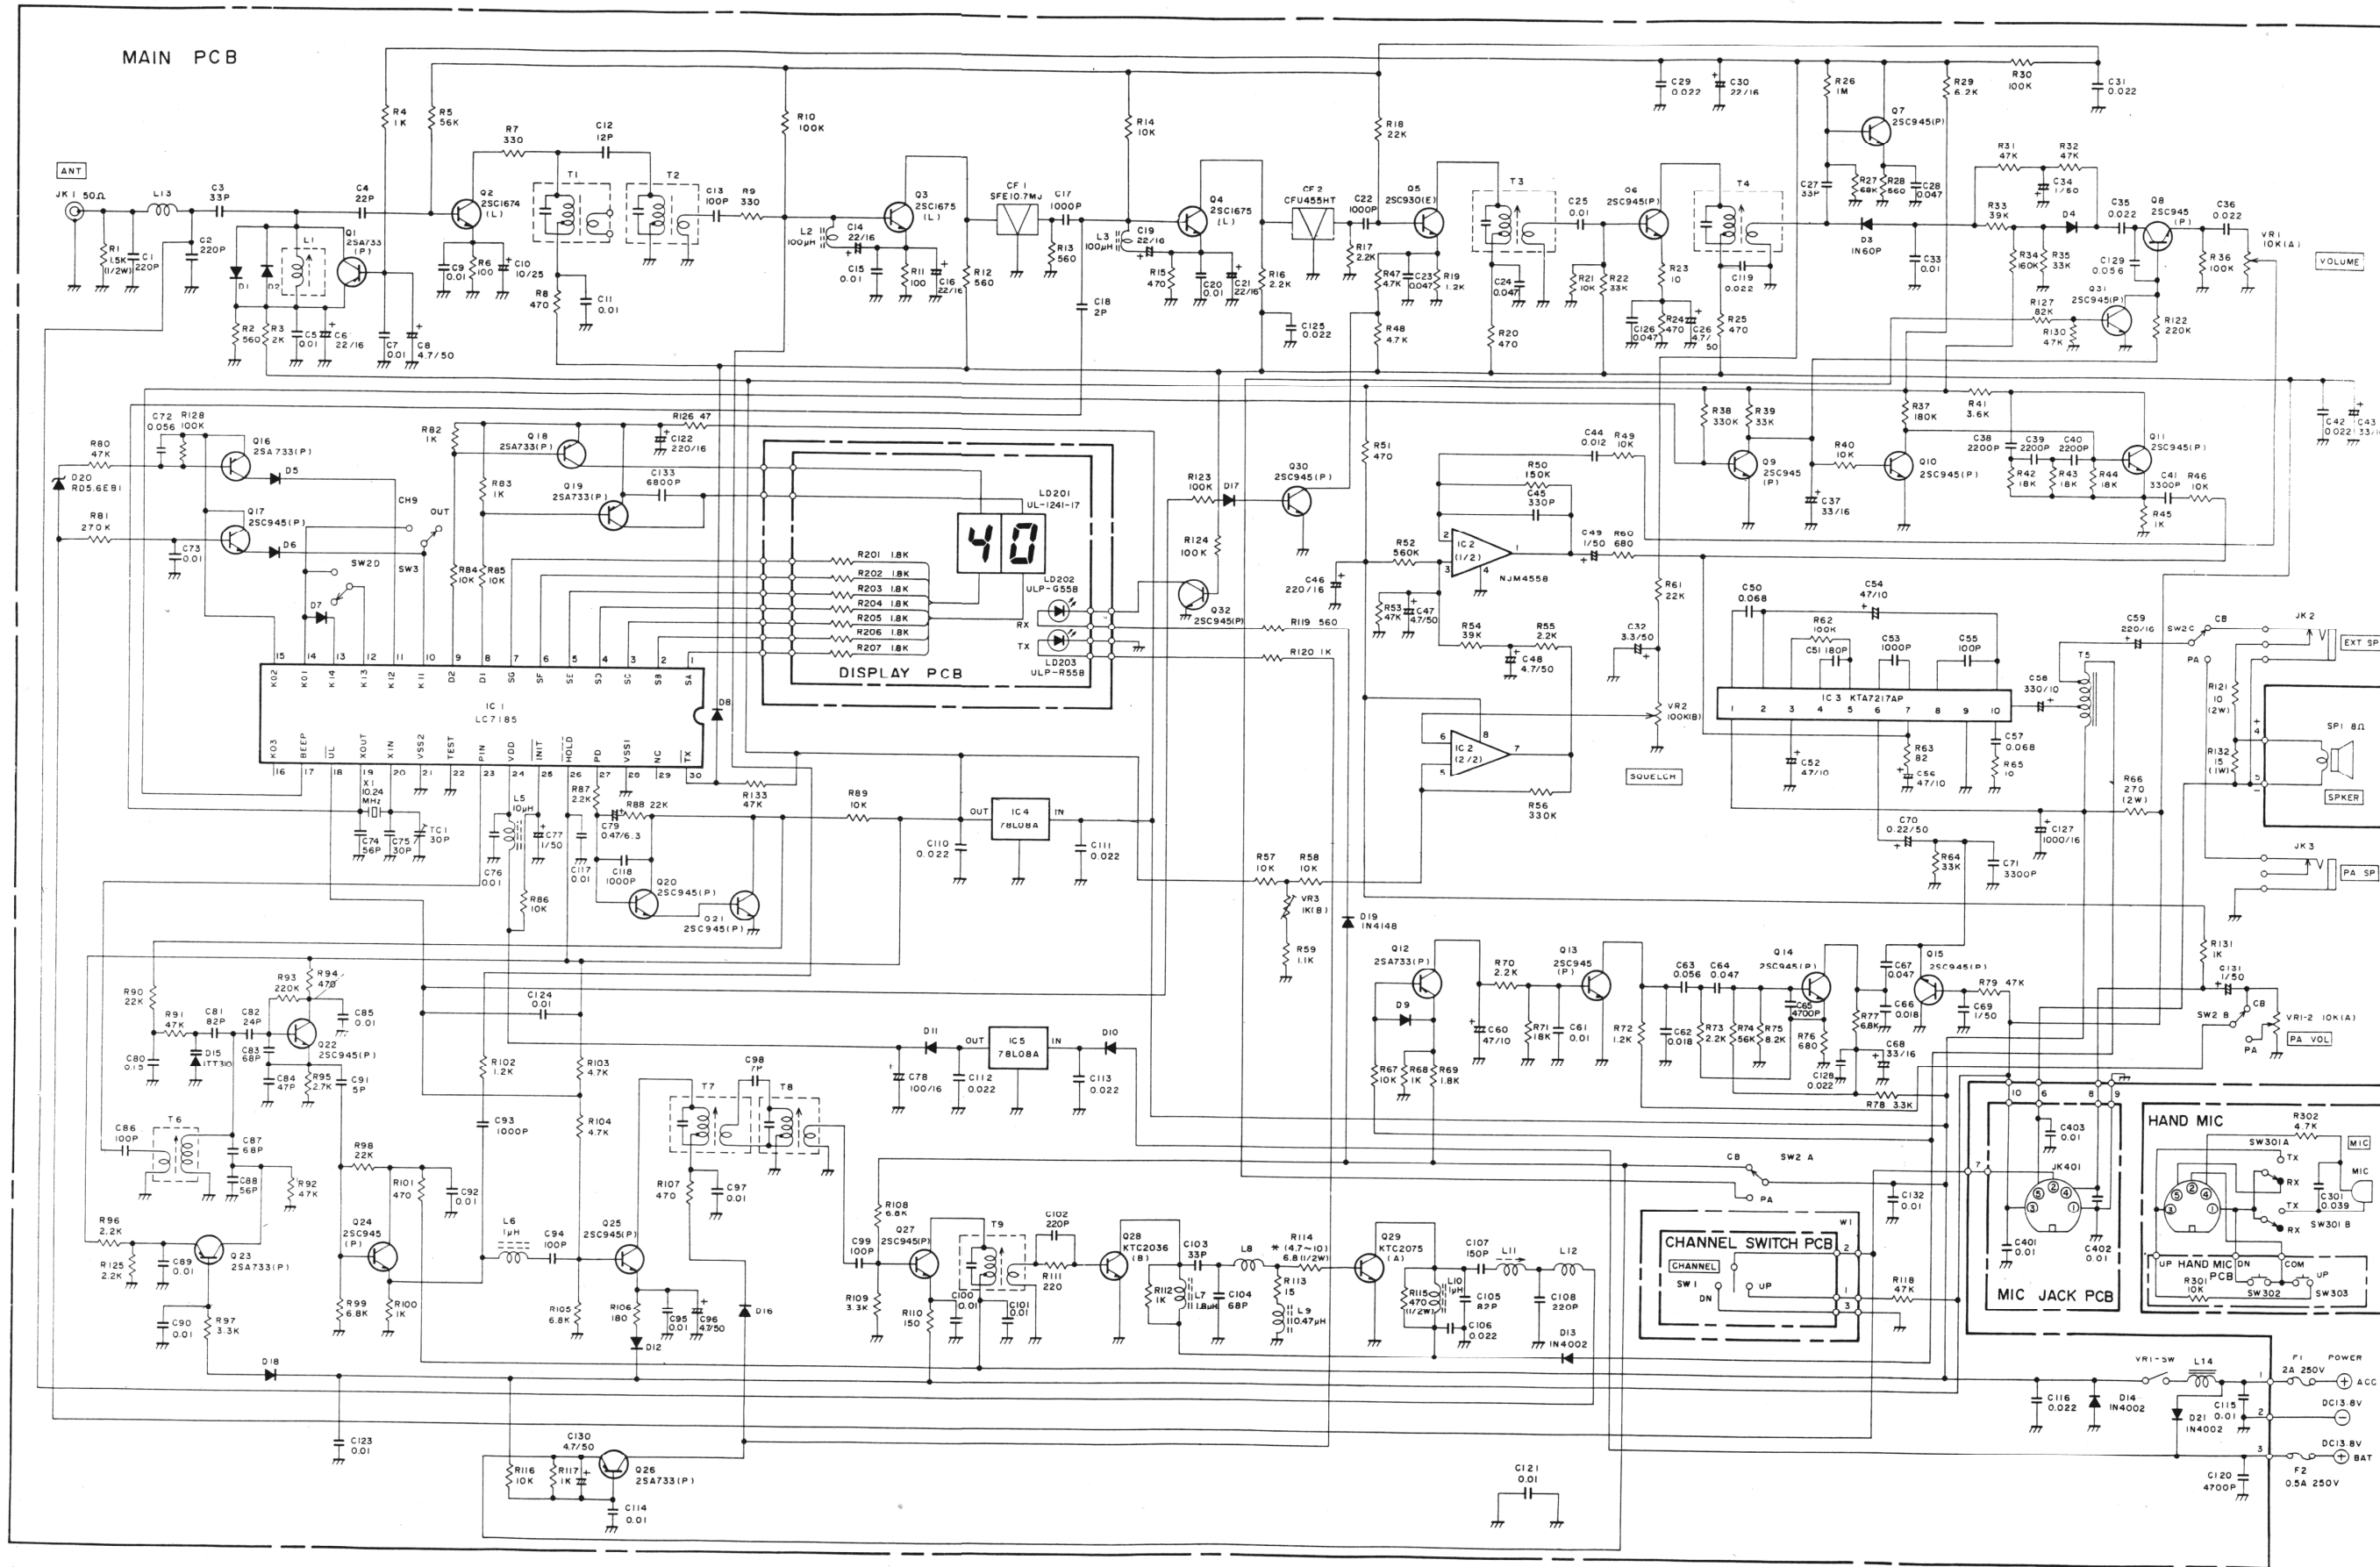

NOTES : (1) ALL RESISTANCE VALUES ARE INDICATED IN " OHM " (K = 10³ OHM, M = 10⁶ OHM).
 (2) ALL CAPACITANCE VALUES ARE INDICATED IN " μF " (P = 10⁻⁶ μF).
 (3) THE VALUE OF THE PARTS WITH * MARK MAY VARY FROM UNIT TO UNIT FOR BEST PERFORMANCE.
 (4) ALL DIODES WITH NO NAMES ARE IN4148.