



SILTRONIX 1011C AND 1011D  
27.5 MHz to 28.0 MHz

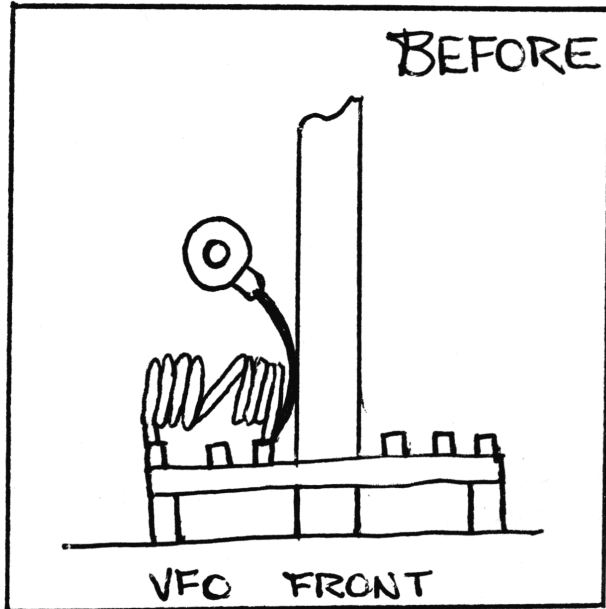

- (1) Remove cabinet from unit and remove the screws and cover of the VFO box.
- (2) Unsolder the coil and scrape off the insulation from the coil in its center as shown.
- (3) Solder a short piece of wire to the center of the coil as shown.
- (4) Resolder the coil back into place and connect the wire to the 28.5 MHz position instead of the end as it was.
- (5) Replace the VFO cover and calibrate the two ranges by adjusting the trimmer capacitors on the top of the VFO box labeled 27.0 and 28.5.

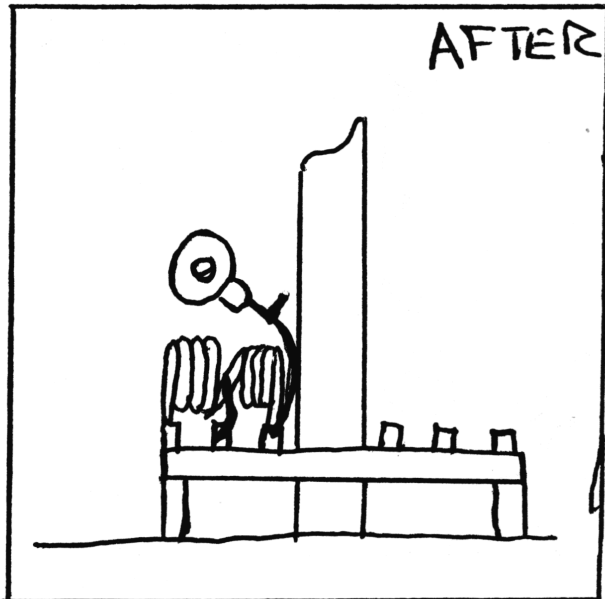

NOTE: Be sure to use a frequency counter to recalibrate the trimmer capacitors on the two bands. The unit will now operate on the lower and upper halves of the eleven meter band.