

REALISTIC TRC-410

This Chassis uses the LC7131 R.O.M. PLL Chip.

Pin Out is as Follows:

Pins	1-6	Ch. Sel. Inputs to R.O.M.
Pins	7	N/C
	8	Ch. 9 Selector or N/C
	9	Ch. 19 Selector or N/C
	10	In between Ch. Kill
	11	Ref. OSC 10.240
	12	Ref. OSC
	13	Ground
	14	Unlock Det.
	15	Phase Det. output
	16	Filter Input
	17	Filter Input
	18	8V Chip Supply
	19	Prog. Div. Input
	20	T/R Switch


TX:

T10 Pre driver stage

Peak T11, L5, L4, L3 for Max.

R95 Can be changed to a piece of wire for increased power.

AMC remove Q12 for maximum modulation.

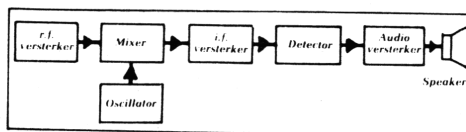

Superhet-ontvanger.

