



COBRA 132-A, 135-A
15KC SLIDER

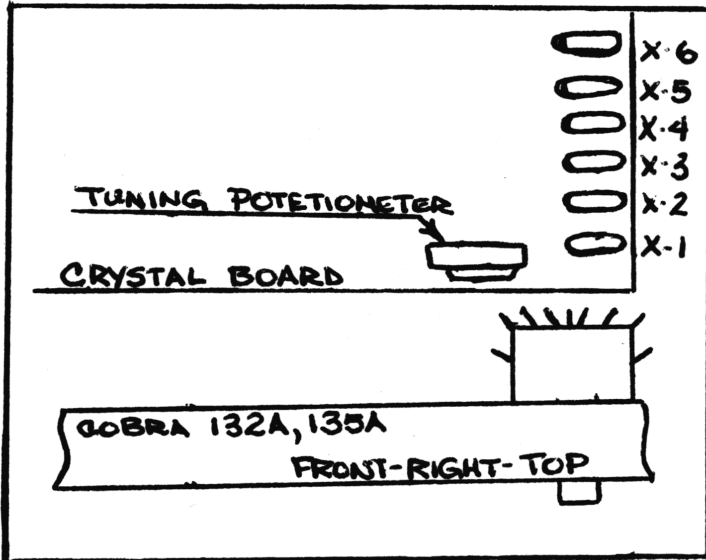

- (1) Remove unit from its cabinet and locate the variable potentiometer next to the crystal bank.
- (2) Adjust the control fully counter clockwise as shown.

NOTE: The unit will now move 15 to 20 KC down frequency with adjustment of the clarifier. If the crystal board is not shown as here the unit is probably a B model. This is shown later in this book.

COBRA 138 13KC SLIDER
(SIDEBAND UNIT)

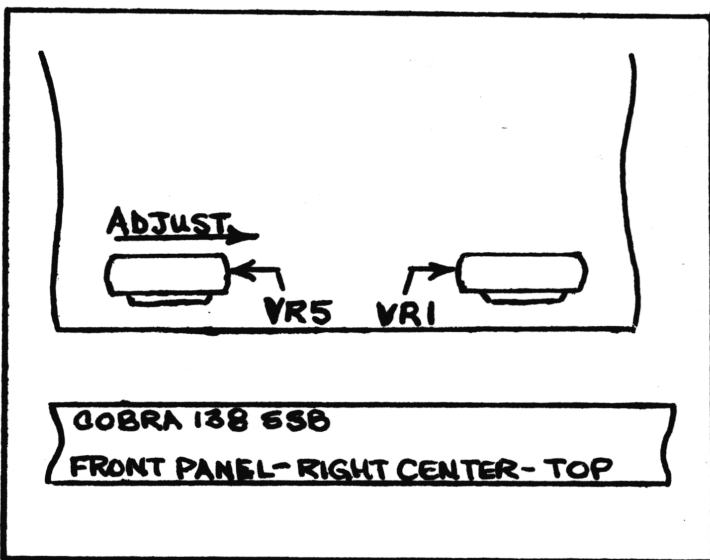

- (1) Remove the unit from its cabinet and locate VR-5.
- (2) Adjust VR-5 to its fully clockwise rotation.
- (3) Do not adjust VR-1.

NOTE: The unit will now move frequency with the clarifier control approximately 13 to 15KC.