


COBRA CAM89 continued:

Even channels from 26.510 - 26.800 can easily be obtained by switching X12 and X11 as shown.

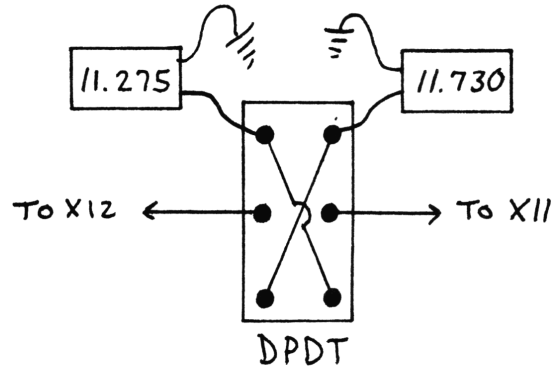

MIKE WIRING: 4 Pin Locking Ring Type - Electronic Switching

1. Shield
2. Audio hot (White)
3. Xmit (Red)
4. REC (Black)

COLT 350 (M-374) D86IC-PLL

RX: R-44, Squelch Range

TX: L29, L30, L31, L32, L33, L34, L37.

R-121 Mic Gain (Adjust for Maximum!)

Q-17 (Remove)

L-19, L20 (Adjust for maximum modulation without distortion.)